

TASK ACOUSTIC 1200

half round


suspended
059-579246G



Project / Type


Notes

Count / Date

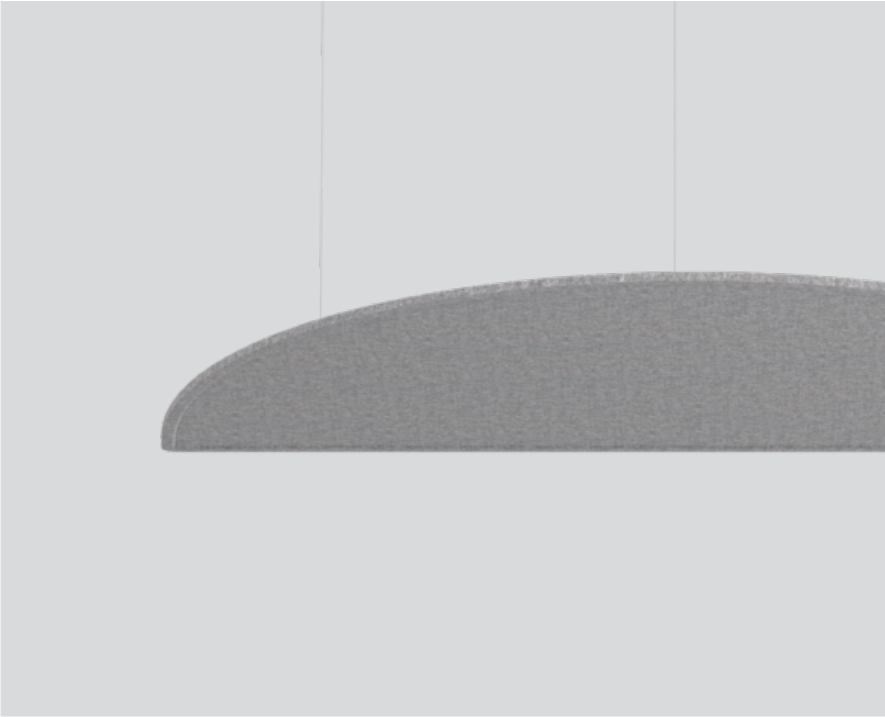

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; half round design; high quality visual and tactile surface, felt grey; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing



General

Ceiling | Suspended

felt grey

fire resistance class: B-s1, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

panel only

length 1155 mm | width 573 mm | height 30 mm

4.2 kg

Acoustics

Alpha w (α_w) up to 0.95¹

SAC (sound absorption class) up to A¹

NRC up to 0.95¹

SAA up to 0.91¹

¹ Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

Installation instructions



TASK ACOUSTIC 1200 half round

suspended
059-579246G



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.3	0.33	0.6	0.77	0.87	0.87

Sound absorption coefficient (α_p)

