

# TASK ACOUSTIC 1200 half square


suspended  
059-579226G



Project / Type

Notes

Count / Date

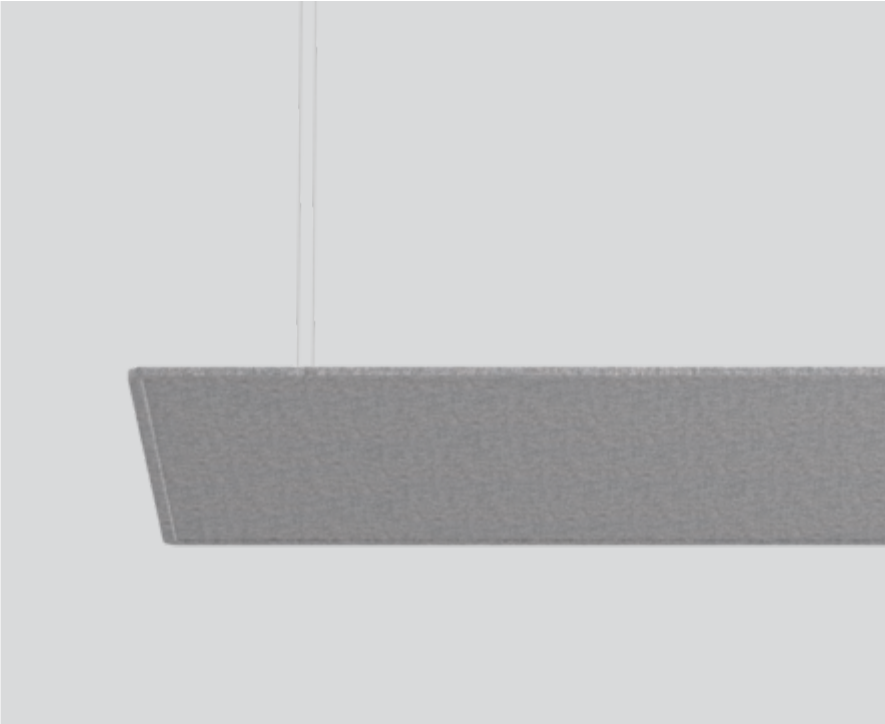

General

Ceiling | Suspended

felt grey

Physical

panel only

length 1155 mm | width 573 mm | height 30 mm

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95<sup>1</sup>

SAC (sound absorption class) up to A<sup>1</sup>

NRC up to 0.95<sup>1</sup>

SAA up to 0.91<sup>1</sup>

<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

## Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; rectangular design; high quality visual and tactile surface, felt grey; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

## Product drawing



# TASK ACOUSTIC 1200 half square

suspended  
059-579226G



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.43	0.4	0.73	0.97	1.1	1.2

## Sound absorption coefficient ( $\alpha_p$ )

