

TASK ACOUSTIC 1200 round


surface
059-579136L



Project / Type


Notes

Count / Date

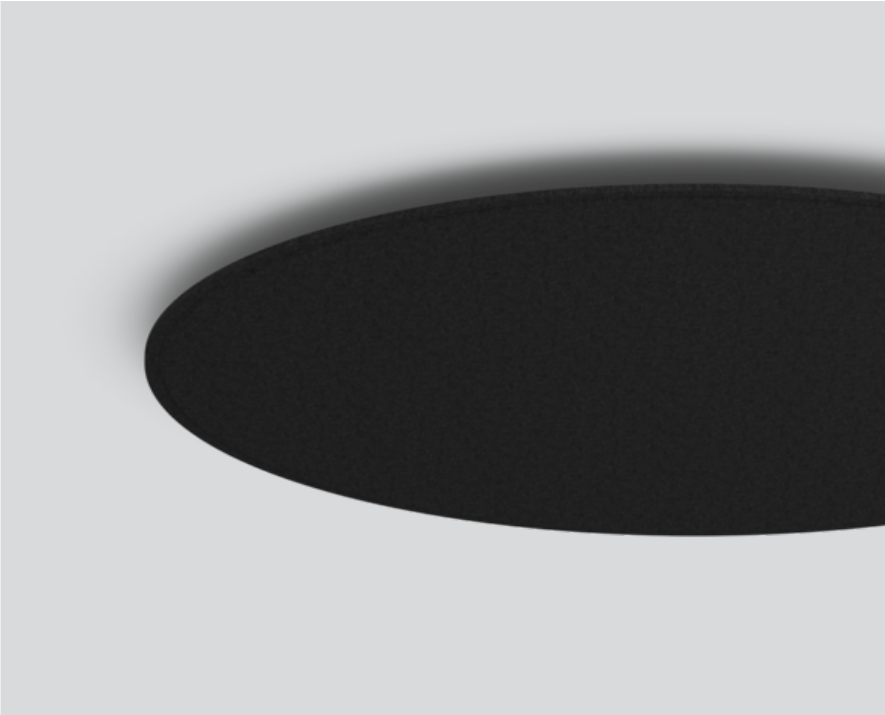

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, black; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; for wall-/ceiling surface mounting;

Product drawing



General

Ceiling | Surface

black

fire resistance class: B-s1, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

panel only

diameter 1155 mm | height 30 mm

4.3 kg

Acoustics

Alpha w (α_w) up to 0.6 ¹

SAC (sound absorption class) up to C ¹

NRC up to 0.75 ¹

SAA up to 0.76 ¹

¹ Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 3cm

Installation instructions



TASK ACOUSTIC 1200 round

surface
059-579136L



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.05	0.31	0.73	1.05	1.05	1.05

Sound absorption coefficient (a_p)

