

TASK ACOUSTIC 600

round

surface


059-579134X



Project / Type


Notes

Count / Date

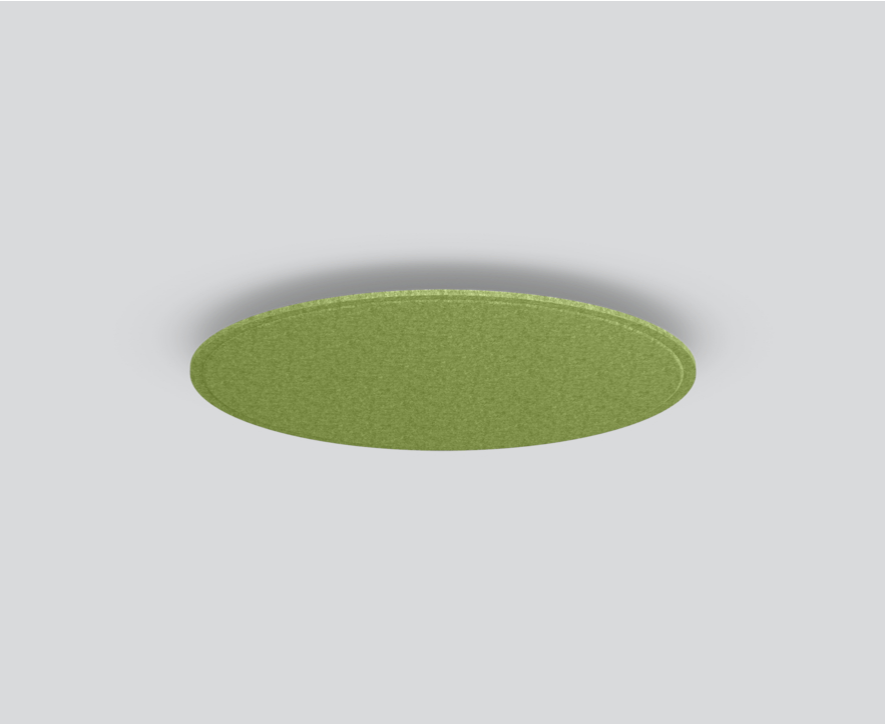

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, acoustic special colours; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; for wall-/ceiling surface mounting;

Product drawing



General

Ceiling | Surface

acoustic special colours

Physical

panel only

diameter 600 mm | height 30 mm

1.9 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.6 <sup>1</sup>

SAC (sound absorption class) up to C <sup>1</sup>

NRC up to 0.75 <sup>1</sup>

SAA up to 0.76 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 3cm

Installation instructions

