

TASK S direct / indirect soft

suspended


059-525603XK



Project / Type

Notes

Count / Date

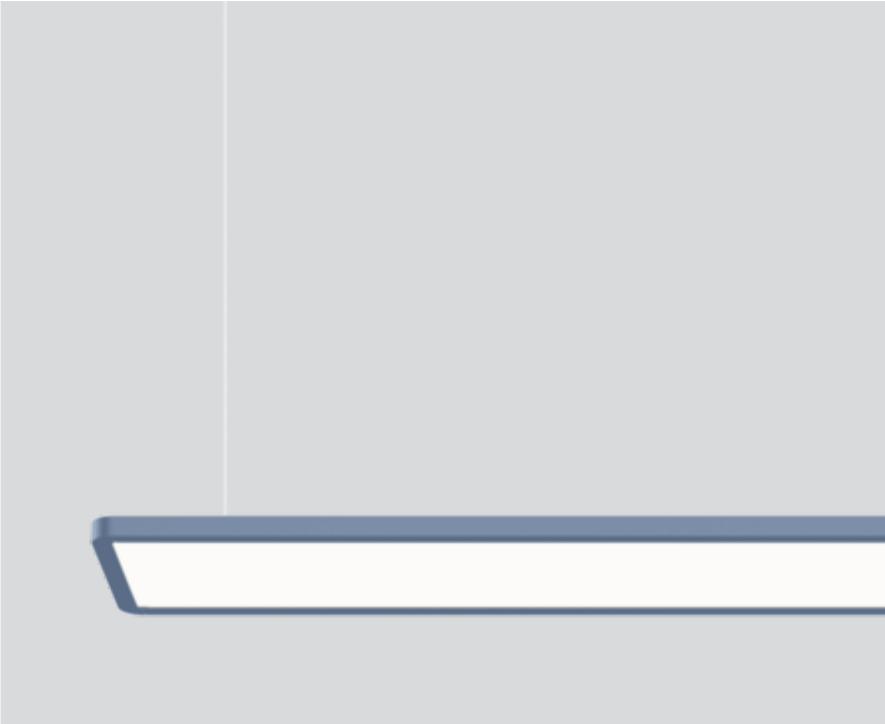

General

Ceiling , Suspended

special colours

IP20

indirect 490 lm

direct 2860 lm

total 3350 lm

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 96 , R_f: 90 , R_{t(1-15)}: 90

MR 0.61

MDER 0.56

Optical

Microprismatic

microprismatic

UGR ≤ 19 , ≥65° <3000 cd/m²

P_{stLM} ≤ 1.0¹

SVM ≤ 0.4¹

Electrical

DALI-2

220-240 V

system 29.2 W

system 115 lm/W²

PC1

1 DALI Addr.

Physical

cable 1500 mm

length 1748 mm


width 180 mm

height 34 mm

5.1 kg

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



Lighting calculator

