

# LINEA opal / 2 spots

wall

058-6178D47DH



Project / Type


Notes

Count / Date




Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,2 W / 141 lm / 3000 K (1x left, 1x right), incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

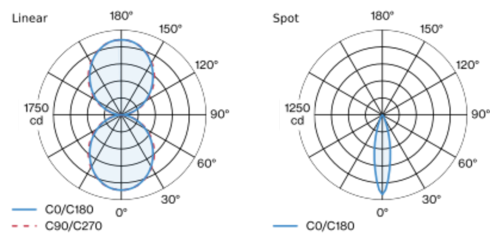

	flood 23°	Spot
h (m)	E0° (lx)	ø (m)
1	584	0.41
2	146	0.83
3	65	1.24
4	37	1.65
5	23	2.07

## Product drawing



## General

Wall | Surface

tilt max 89°

white | RAL 9010 <sup>1</sup>

IP20

282 lm

## LED

3000 K<sup>2</sup>-tunable white<sup>3</sup> | 2700 K - 5000 K

CRI  $\geq 90$

L80 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 100<sup>2</sup>-99<sup>3</sup> | R<sub>f</sub>: 91<sup>2</sup>-90<sup>3</sup> | R<sub>f(1-15)</sub>: 89<sup>2</sup>-88<sup>3</sup>

MR 0.59<sup>2</sup>-0.53<sup>3</sup> | MDER 0.53<sup>2</sup>-0.48<sup>3</sup>

## Optical

beam angle 23°

PstLM  $\leq 1.0$ <sup>2</sup> <sup>3</sup> <sup>4</sup> | SVM  $\leq 0.4$ <sup>2</sup> <sup>3</sup> <sup>4</sup>

High Performance Opal | flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

## Electrical

DALI-2 / DIM switch (only spotlights)<sup>2</sup>-DALI-2

DT8 / DIM switch (only spotlights)<sup>3</sup> | 1 DALI Addr.

PC1 | 220-240 V

system 4.5<sup>2</sup>-83<sup>3</sup> W

system 63<sup>2</sup>-97<sup>3</sup> lm/W <sup>5</sup>

## Physical

length 2610 mm | width 40 mm | height 100 mm

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions

