

LINEA opal / 2 spots

wall

058-6178D47DH



Project / Type

Notes

Count / Date



General

Wall | Surface

tilt max 89°

white | RAL 9010 ¹

IP20

282 lm

LED

3000 K²-tunable white³ | 2700 K - 5000 K

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 100²-99³ | R_f: 91²-90³ | R_{f(1-15)}: 89²-88³

MR 0.59²-0.53³ | MDER 0.53²-0.48³

Optical

beam angle 23°

PstLM ≤ 1.0² ³ 4 | SVM ≤ 0.4² ³ 4

High Performance Opal | flood²-opal (lambertsch)³

Electrical

DALI-2 / DIM switch (only spotlights)²-DALI-2
DT8 / DIM switch (only spotlights)³ | 1 DALI Addr.

PC1 | 220-240 V

system 4.5² ³ 4 W


system 63²-97³ lm/W ⁵

Physical

length 2610 mm | width 40 mm | height 100 mm

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,2 W / 141 lm / 3000 K (1x left, 1x right), incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution

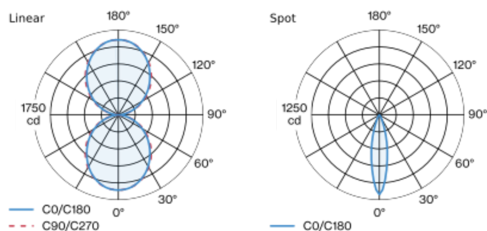

flood 23° Spot

h (m)	E0° (lx)	ø (m)
1	584	0.41
2	146	0.83
3	65	1.24
4	37	1.65
5	23	2.07

Product drawing



¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)

⁵ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Installation instructions



[058-6178D47DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

15.06.2025

LINEA opal / 2 spots

wall
058-6178D47DH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	9
B13	12
B16	15
B20	19
C10	15
C13	20
C16	25
C20	32

