

TASK 450 square direct

surface


059-2141038K



Project / Type

Notes

Count / Date

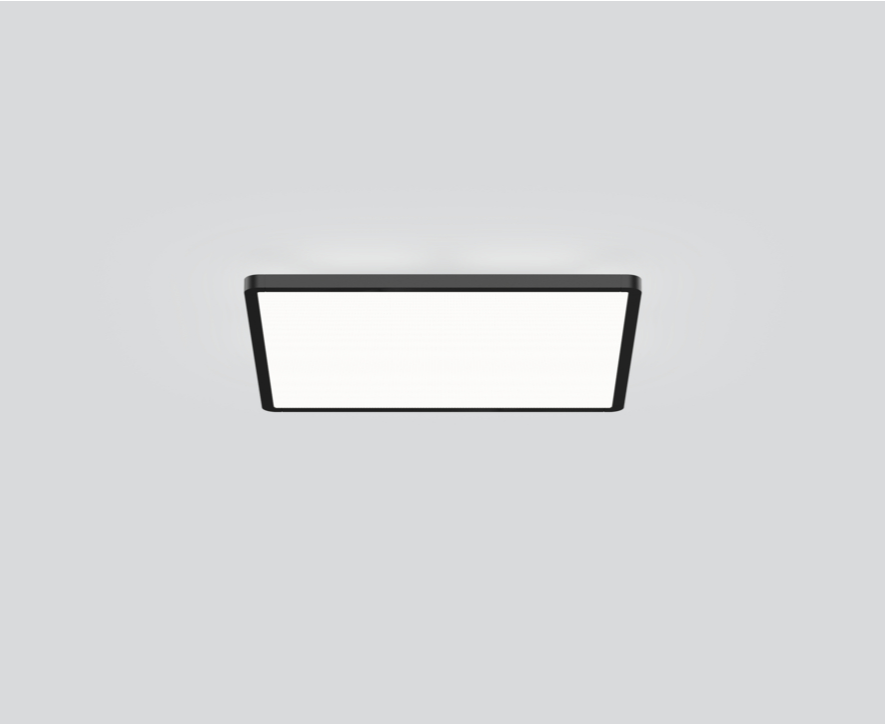

square luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in an elegant design for high demands; surface black powder coated; suitable for wall or ceiling mounting; convenient quick mounting system without tools; direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; microprismatic PMMA cover; completely homogeneous illumination; same light density for all surface lights with the same components; $UGR \leq 19$; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; light colour 3000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; $CRI \geq 90$; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminals for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General

Ceiling / Wall | Surface

black | RAL 9005 ¹

IP20

1880 lm

LED

3000 K

$CRI \geq 90$

L90 / 50000 h

initial MacAdam $\leq 3 \text{ SDCM}$

$R_g: 96 | R_f: 90 | R_{[-15]}: 89$

MR 0.61 | MDER 0.56

Optical

Microprismatic | microprismatic

$UGR \leq 19 | \geq 65^\circ < 3000 \text{ cd/m}^2$

$PstLM \leq 1.0 \text{ }^2 | SVM \leq 0.4 \text{ }^2$

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 15.0 W

system 125 lm/W ³


Physical

length 450 mm | width 450 mm | height 46 mm


3.9 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions

