

LINEA opal / 2 spots

wall

058-6178627DH



Project / Type

Notes

Count / Date



General

Wall | Surface

white | RAL 9010 ¹

IP20

indirect 3850 lm | direct 3850 lm

total 7700 lm

3200 lm/m

tilt max 89°

344 lm

LED

3000 K²-4000 K³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-98³ | R_f: 86²-90³ | R_{t1-15}: 94²-88³

MR 0.53²-0.76³ | MDER 0.48²-0.69³

Optical


High Performance Opal | flood²-opal (lambertsch)³

PstLM ≤ 1.0³ ² ⁴ | SVM ≤ 0.4³ ² ⁴

beam angle 30°


Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right), incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

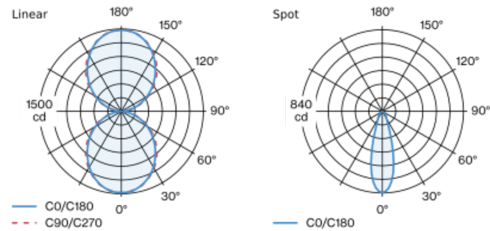

flood 30°		Spot	
h (m)	E0° (lx)	ø (m)	
1	419	0.54	
2	105	1.09	
3	47	1.63	
4	26	2.17	
5	17	2.72	

Product drawing



Physical

length 2610 mm | width 40 mm | height 100 mm

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

