

LINEA opal / 1 spot

wall

058-6178627CH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface pure white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97 ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K right, incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

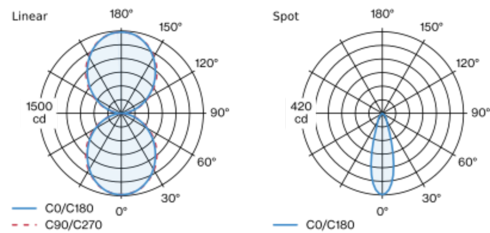

— C0/C180

- - - C90/C270

— C0/C180

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



General

Wall | Surface

tilt max 89°

pure white | RAL 9010

IP20

172 lm

LED

3000 K¹-4000 K²

CRI ≥ 97 ¹-90²

L95 / 50000 h¹-L85 / 50000 h²

initial MacAdam ≤ 3 SDCM

R_g: 102¹-98² | R_f: 96¹-90² | R_{t1-15}: 96¹-88²

MR 0.63¹-0.76² | MDER 0.57¹-0.69²

Optical

beam angle 30°

PstLM ≤ 1.0 ^{1 2 3} | SVM ≤ 0.4 ^{1 2 3}

High Performance Opal | flood¹-opal (lambertsch)²

Electrical

non DIM / ON|OFF switch (only spotlights)

PC1 | 220-240 V

system 2.7¹-70² W

system 64¹-110² lm/W⁴

Physical

length 2510 mm | width 40 mm | height 100 mm

spotlight right

¹ Spot ² Linear
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

