

LINEA opal / 1 spot

wall

058-6178627BH



Project / Type

Notes

Count / Date



General

Wall , Surface

tilt max 89°

white , RAL 9010 ¹

IP20

172 lm

LED

3000 K²-4000 K³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-98³ , R_f: 86²-90³ , R₍₁₋₁₅₎: 94²-88³

MR 0.53²-0.76³

MDER 0.48²-0.69³

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0² ³ ⁴

SVM ≤ 0.4² ³ ⁴

High Performance Opal

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K left, incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

non DIM / switch (only spotlights)


220-240 V

system 2.7²-70³ W

system 64²-110³ lm/W⁵

PC1


Light distribution

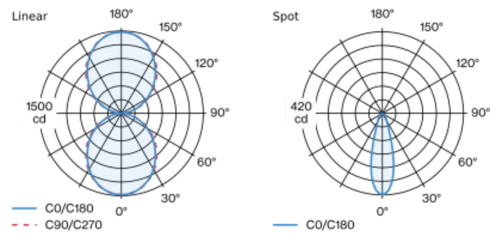

flood 30° Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 419 | 0.54 |
| 2 | 105 | 1.09 |
| 3 | 47 | 1.63 |
| 4 | 26 | 2.17 |
| 5 | 17 | 2.72 |

Product drawing



Physical

length 2510 mm

width 40 mm

height 100 mm

left

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LINEA opal / 1 spot

wall

058-6178627BH



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.91 | 0.89 |
| LSF | 1 | 1 | 1 | 1 | 1 |

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 10 |
| B13 | 12 |
| B16 | 16 |
| B20 | 21 |
| C10 | 17 |
| C13 | 21 |
| C16 | 28 |
| C20 | 35 |

