

TASK S direct / indirect power

suspended


059-526813XK



Project / Type

Notes

Count / Date

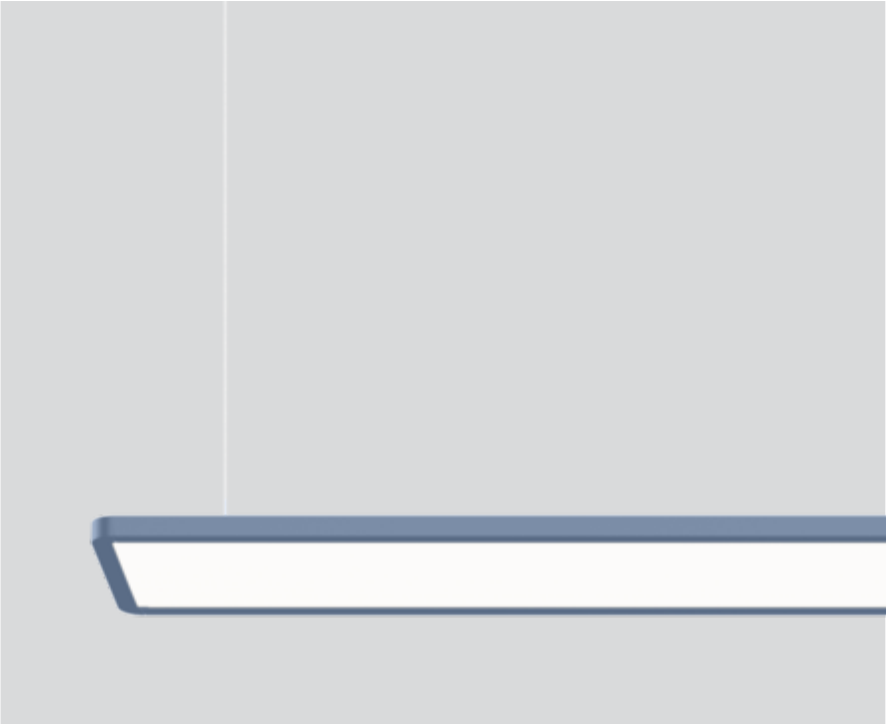

General

Ceiling , Suspended

special colours

IP20

indirect 3270 lm

direct 4030 lm

total 7300 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 96 , R_f: 90 , R₍₁₋₁₅₎: 87

MR 0.75

MDER 0.68

Optical

Microprismatic

microprismatic

UGR ≤ 16 , $\geq 65^\circ$ <3000 cd/m²

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

DALI-2

220-240 V

system 59 W

system 124 lm/W²

PC1

2 DALI Addr.

Physical

cable 1500 mm

length 2315 mm

width 180 mm


height 34 mm

7.2 kg


¹ Value of containing product at full load (undimmed)

² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



Lighting calculator

