

# LINEA opal / 1 spot

wall

058-6178548CH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,2 W / 141 lm / 3000 K right, incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

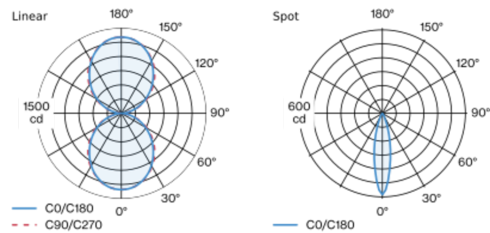

flood 23°			Spot		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	584	0.41	1	584	0.41
2	146	0.83	2	146	0.83
3	65	1.24	3	65	1.24
4	37	1.65	4	37	1.65
5	23	2.07	5	23	2.07

## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions

