

LINEA opal / 1 spot

wall

058-6178548CH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,2 W / 141 lm / 3000 K right, incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

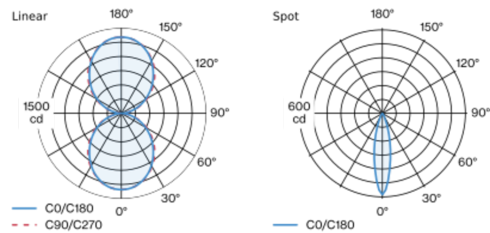

flood 23°			Spot		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	584	0.41	1	584	0.41
2	146	0.83	2	146	0.83
3	65	1.24	3	65	1.24
4	37	1.65	4	37	1.65
5	23	2.07	5	23	2.07

Product drawing



General

Wall | Surface

tilt max 89°

black | RAL 9005 ¹

IP20

141 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 100²-99³ | R_f: 91 | R_{t(15)}: 89

MR 0.59²-0.61³ | MDER 0.53²-0.55³

Optical

beam angle 23°

PstLM ≤ 1.0 ² ³ ⁴ | SVM ≤ 0.4 ² ³ ⁴

High Performance Opal | flood²-opal (lambertsch)³

Electrical

DALI-2 / DIM switch (only spotlights) | 1 DALI Addr.

PC1 | 220-240 V

system 2.2²-70³ W

system 64²-100³ lm/W ⁵

Physical

length 2510 mm | width 40 mm | height 100 mm

right

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LINEA opal / 1 spot

wall
058-6178548CH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF^a

Luminaire Maintenance Factor

RSMF^a

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	9
B13	12
B16	15
B20	19
C10	15
C13	20
C16	25
C20	31

