

# LINEA opal / 1 spot

wall

058-6178547BH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,2 W / 141 lm / 3000 K left, incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

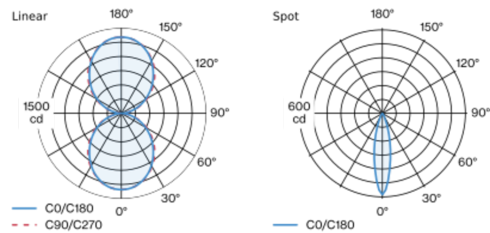

flood 23° Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 584      | 0.41  |
| 2     | 146      | 0.83  |
| 3     | 65       | 1.24  |
| 4     | 37       | 1.65  |
| 5     | 23       | 2.07  |

## Product drawing



## General

Wall | Surface

tilt max 89°

white | RAL 9010 <sup>1</sup>

IP20

141 lm

## LED

3000 K

CRI  $\geq 90$

L80 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 100<sup>2</sup>-99<sup>3</sup> | R<sub>f</sub>: 91 | R<sub>f(1-15)</sub>: 89

MR 0.59<sup>2</sup>-0.61<sup>3</sup> | MDER 0.53<sup>2</sup>-0.55<sup>3</sup>

## Optical

beam angle 23°

PstLM  $\leq 1.0$ <sup>2 3 4</sup> | SVM  $\leq 0.4$ <sup>2 3 4</sup>

High Performance Opal | flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

## Electrical

DALI-2 / DIM switch (only spotlights) | 1 DALI Addr.

PC1 | 220-240 V

system 2.2<sup>2</sup>-70<sup>3</sup> W

system 64<sup>2</sup>-100<sup>3</sup> lm/W <sup>5</sup>

## Physical

length 2510 mm | width 40 mm | height 100 mm

left

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



# LINEA opal / 1 spot

wall

058-6178547BH



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.98   | 0.96   | 0.94   | 0.91   | 0.89   |
| LSF                | 1      | 1      | 1      | 1      | 1      |

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF<sup>a</sup>

Luminaire Maintenance Factor

RSMF<sup>a</sup>

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Factor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 9                  |
| B13                            | 12                 |
| B16                            | 15                 |
| B20                            | 19                 |
| C10                            | 15                 |
| C13                            | 20                 |
| C16                            | 25                 |
| C20                            | 31                 |

