

LINEA opal / 2 spots

wall

058-6178527DH



Project / Type _____

Notes _____

Count / Date _____



General

Wall , Surface _____

tilt max 89° _____

white , RAL 9010 ¹ _____

IP20 _____

344 lm _____

LED

3000 K _____

CRI ≥ 97²-90³ _____

L95 / 50000 h²-L85 / 50000 h³ _____

initial MacAdam ≤ 3 SDCM _____

R_g: 92²-99³ , R_f: 86²-91³ , R_{f(1-15)}: 94²-89³ _____

MR 0.53²-0.61³ _____

MDER 0.48²-0.55³ _____

Optical

flood²-opal (lambertsch)³ _____

beam angle 30° _____


PstLM ≤ 1.0² ³ ⁴ _____

SVM ≤ 0.4² ³ ⁴ _____

High Performance Opal _____

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right), incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution

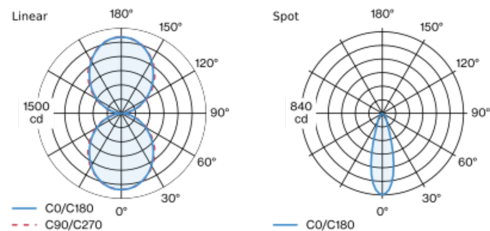

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



Physical

length 2610 mm _____

width 40 mm _____

height 100 mm _____

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)

⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



[058-6178527DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

02.05.2025

LINEA opal / 2 spots

wall
058-6178527DH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF^a

Luminaire Maintenance Factor

RSMF^a

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	10
B13	12
B16	16
B20	21
C10	17
C13	21
C16	28
C20	35