

# LINEA opal / 2 spots

wall

058-6174527DH



Project / Type

Notes

Count / Date



## General

Wall , Surface

tilt max 89°

white , RAL 9010 <sup>1</sup>

IP20

344 lm

## LED

3000 K

CRI ≥ 97<sup>2</sup>-90<sup>3</sup>

L95 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 92<sup>2</sup>-99<sup>3</sup>, R<sub>f</sub>: 86<sup>2</sup>-91<sup>3</sup>, R<sub>f(1-15)</sub>: 94<sup>2</sup>-89<sup>3</sup>

MR 0.53<sup>2</sup>-0.61<sup>3</sup>

MDER 0.48<sup>2</sup>-0.55<sup>3</sup>

## Optical

flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

beam angle 30°

PstLM ≤ 1.0<sup>2</sup> 3 4

SVM ≤ 0.4<sup>2</sup> 3 4

High Performance Opal

## Electrical

non DIM / switch (only spotlights)

220-240 V

system 5.4<sup>2</sup>-35<sup>3</sup> W

system 64<sup>2</sup>-99<sup>3</sup> lm/W<sup>5</sup>

PC1

## Physical

length 1410 mm

width 40 mm

height 100 mm

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear

<sup>4</sup> Value of containing product at full load (undimmed)

<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency


## Installation

### instructions




Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right), incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

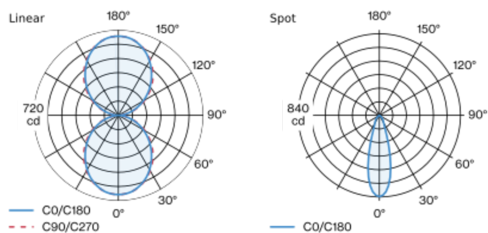

## Product drawing



flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72



[058-6174527DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

30.04.2025