

LINEA opal / 1 spot

wall

058-6174D37CH



Project / Type

Notes

Count / Date



General

Wall Surface
white RAL 9010 ¹
IP20
indirect 2020 lm direct 2020 lm
total 4040 lm
3350 lm/m
tilt max 89°
172 lm

LED

3000 K ² -tunable white ³ 2700 K - 5000 K
CRI ≥ 97 ² -90 ³
L95 / 50000 h ² -L85 / 50000 h ³
initial MacAdam ≤ 3 SDCM
R _g : 92 ² -99 ³ R _f : 86 ² -90 ³ R _{t[1-15]} : 94 ² -88 ³
MR 0.53 MDER 0.48

Optical

High Performance Opal flood ² -opal (lambertsch) ³
PstLM ≤ 1.0 ³ ² 4 SVM ≤ 0.4 ³ ² 4
beam angle 30°

Electrical


DALI-2 ² -DALI-2 DT8 ³ 1 DALI Addr.
PC1 220-240 V
system 2.7 ² -42 ³ W
system 64 ² -96 ³ lm/W ⁵
35 W/m

Physical

length 1310 mm width 40 mm height 100 mm
right

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency


Light distribution

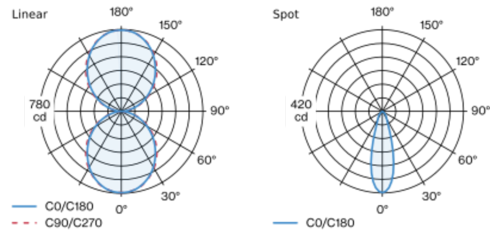

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



Installation instructions

