

LINEA opal / 1 spot

wall

058-6174D37BH



Project / Type

Notes

Count / Date



General

Wall | Surface

tilt max 89°

pure white | RAL 9010

IP20

172 lm

LED

3000 K¹-tunable white² | 2700 K - 5000 K

CRI ≥ 97¹-90²

L95 / 50000 h¹-L85 / 50000 h²

initial MacAdam ≤ 3 SDCM

R_g: 102¹-99² | R_f: 96¹-90² | R_{1-15}: 96¹-88²

MR 0.63¹-0.53² | MDER 0.57¹-0.48²

Optical

beam angle 30°

PstLM ≤ 1.0¹ 2 3 | SVM ≤ 0.4¹ 2 3

High Performance Opal | flood¹-opal (lambertsch)²

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 2.7¹-42² W

system 64¹-96² lm/W⁴

DT8


Physical

length 1310 mm | width 40 mm | height 100 mm

spotlight left

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface pure white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K left; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

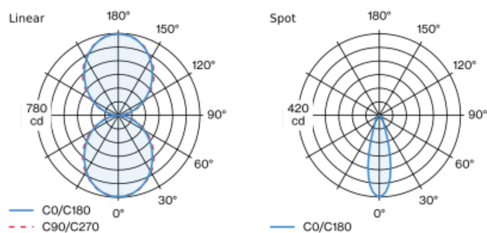

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



¹ Spot ² Linear

³ Value of containing product at full load (undimmed)

⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



[058-6174D37BH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

03.08.2025

LINEA opal / 1 spot

wall

058-6174D37BH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1



MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	13
B13	16
B16	22
B20	27
C10	21
C13	28
C16	36
C20	45

Colour rendering

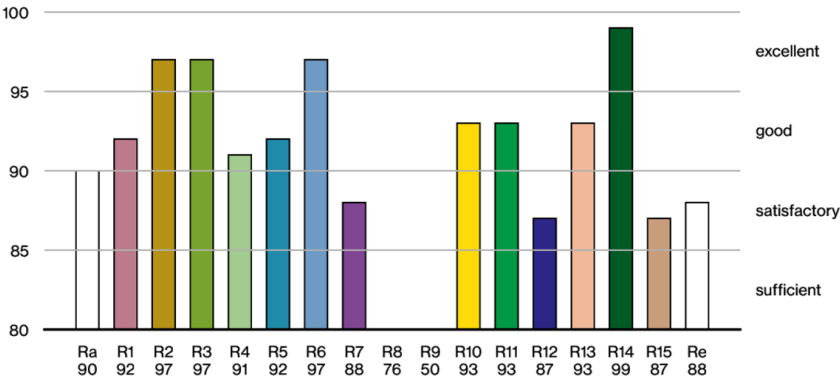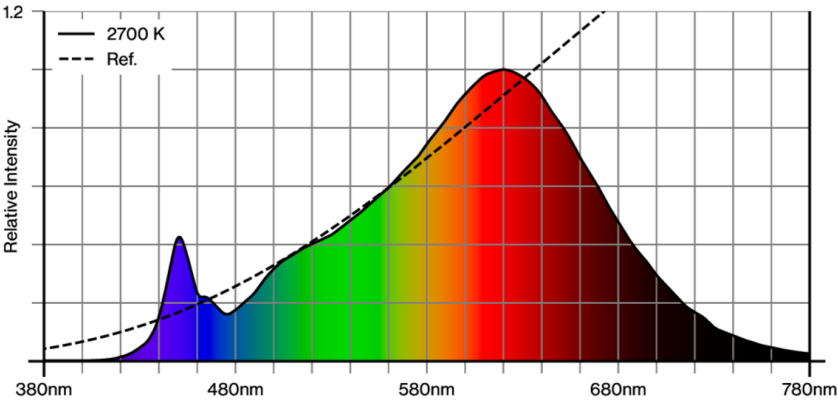

TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

