

LINEA opal / 1 spot

wall

058-6172D37BH



Project / Type

Notes

Count / Date



General

Wall , Surface

tilt max 89°

white , RAL 9010 ¹

IP20

172 lm

LED

3000 K²-tunable white³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³ , R_r: 86²-90³ , R_{t(1-15)}: 94²-88³

MR 0.53

MDER 0.48

2700 K - 5000 K

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0² 3 4

SVM ≤ 0.4² 3 4

High Performance Opal

Electrical

DALI-2²-DALI-2 DT8³

220-240 V

system 2.7²-20.9³ W

system 64²-97³ lm/W⁵

PC1

1 DALI Addr.

Physical

length 710 mm

width 40 mm


height 100 mm

2 kg

left

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency


Light distribution

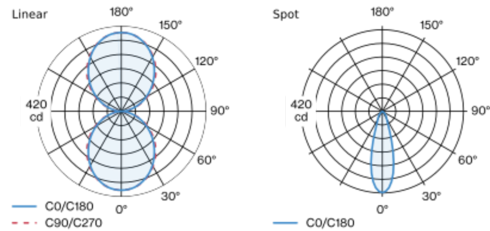

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



Installation instructions



LINEA opal / 1 spot

wall

058-6172D37BH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF^a

Luminaire Maintenance Factor

RSMF^a

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	13
B13	16
B16	22
B20	27
C10	21
C13	28
C16	36
C20	45

