

LINEA opal / 1 spot

wall

058-6172648CH



Project / Type

Notes

Count / Date



General

Wall | Surface

tilt max 89°

black | RAL 9005 ¹

IP20

141 lm

LED

3000 K²-4000 K³

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 100²-98³ | R_f: 91²-90³ | R_{f(1-15)}: 89²-88³

MR 0.59²-0.76³ | MDER 0.53²-0.69³

Optical

beam angle 23°

PstLM ≤ 1.0² ³ ⁴ | SVM ≤ 0.4² ³ ⁴

High Performance Opal | flood²-opal (lambertsch)³

Electrical

DALI-2 / DIM switch (only spotlights) | 1 DALI Addr.

PC1 | 220-240 V

system 2.2²-17.6³ W

system 64²-109³ lm/W ⁵


Physical

length 710 mm | width 40 mm | height 100 mm

right


Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,2 W / 141 lm / 3000 K right, incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

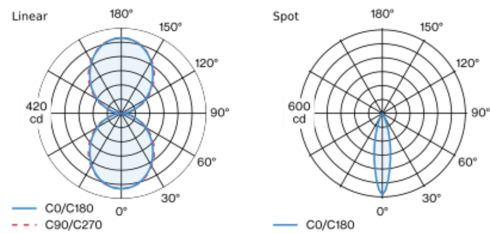

| flood 23° | | Spot | |
|-----------|----------|-------|--|
| h (m) | E0° (lx) | ø (m) | |
| 1 | 584 | 0.41 | |
| 2 | 146 | 0.83 | |
| 3 | 65 | 1.24 | |
| 4 | 37 | 1.65 | |
| 5 | 23 | 2.07 | |

Product drawing



¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LINEA opal / 1 spot

wall
058-6172648CH



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.91 | 0.89 |
| LSF | 1 | 1 | 1 | 1 | 1 |

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF^a

Luminaire Maintenance Factor

RSMF^a

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 18 |
| B13 | 23 |
| B16 | 28 |
| B20 | 35 |
| C10 | 30 |
| C13 | 38 |
| C16 | 46 |
| C20 | 58 |

