

LINEA opal / 1 spot

wall

058-6174647CH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,2 W / 141 lm / 3000 K right, incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

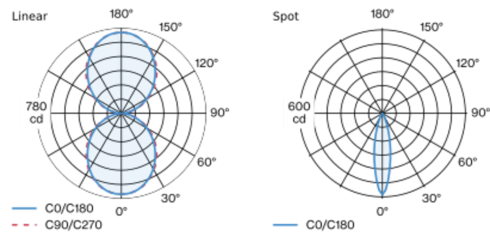

flood 23°			Spot		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	584	0.41	1	584	0.41
2	146	0.83	2	146	0.83
3	65	1.24	3	65	1.24
4	37	1.65	4	37	1.65
5	23	2.07	5	23	2.07

Product drawing



General

Wall | Surface

tilt max 89°

white | RAL 9010 ¹

IP20

141 lm

LED

3000 K²-4000 K³

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 100²-98³ | R_f: 91²-90³ | R_{f(1-15)}: 89²-88³

MR 0.59²-0.76³ | MDER 0.53²-0.69³

Optical

beam angle 23°

PstLM $\leq 1.0^2$ ³ ⁴ | SVM $\leq 0.4^2$ ³ ⁴

High Performance Opal | flood²-opal (lambertsch)³

Electrical

DALI-2 / DIM switch (only spotlights) | 1 DALI Addr.

PC1 | 220-240 V

system 2.2²-35³ W

system 64²-110³ lm/W ⁵

Physical

length 1310 mm | width 40 mm | height 100 mm

right

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LINEA opal / 1 spot

wall
058-6174647CH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B13	23
B16	28
B20	35
C10	30
C13	38
C16	46
C20	58

