

LINEA opal / 1 spot

wall

058-6172628BH



Project / Type

Notes

Count / Date



General

Wall , Surface

tilt max 89°

black , RAL 9005 ¹

IP20

172 lm

LED

3000 K²-4000 K³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-98³ , R_f: 86²-90³ , R₍₁₋₁₅₎: 94²-88³

MR 0.53²-0.76³

MDER 0.48²-0.69³

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0² 3 ⁴

SVM ≤ 0.4² 3 ⁴

High Performance Opal

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K left, incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

non DIM / switch (only spotlights)


220-240 V

system 2.7²-17.6³ W

system 64²-109³ lm/W⁵


PC1

Light distribution

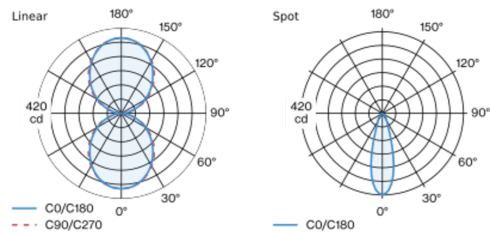

| flood 30° | | Spot | |
|-----------|----------|-------|--|
| h (m) | E0° (lx) | ø (m) | |
| 1 | 419 | 0.54 | |
| 2 | 105 | 1.09 | |
| 3 | 47 | 1.63 | |
| 4 | 26 | 2.17 | |
| 5 | 17 | 2.72 | |

Product drawing



Physical

length 710 mm

width 40 mm

height 100 mm

left

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)

⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



LINEA opal / 1 spot

wall

058-6172628BH



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.91 | 0.89 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Factor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 23 |
| B13 | 30 |
| B16 | 36 |
| B20 | 46 |
| C10 | 35 |
| C13 | 50 |
| C16 | 60 |
| C20 | 76 |

