

LINEA opal / 2 spots

wall

058-6174537DH



Project / Type


Notes

Count / Date




Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface pure white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97 ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right); incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

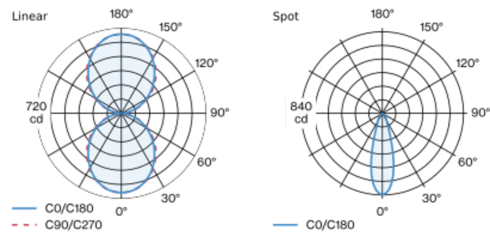

flood 30°			Spot		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	419	0.54	1	419	0.54
2	105	1.09	2	105	1.09
3	47	1.63	3	47	1.63
4	26	2.17	4	26	2.17
5	17	2.72	5	17	2.72

Product drawing



General

Wall | Surface

tilt max 89°

pure white | RAL 9010

IP20

344 lm

LED

3000 K

CRI $\geq 97^{1-90^2}$

L95 / 50000 h¹-L85 / 50000 h²

initial MacAdam ≤ 3 SDCM

R_g: 102¹-99² | R_f: 96¹-91² | R_{ft-15}: 96¹-89²

MR 0.63¹-0.61² | MDER 0.57¹-0.55²

Optical

beam angle 30°

PstLM $\leq 1.0^{1-2-3}$ | SVM $\leq 0.4^{1-2-3}$

High Performance Opal | flood¹-opal (lambertsch)²

Electrical

DALI-2 | 2¹-1² DALI Addr.

PC1 | 220-240 V

system 5.4¹-35² W

system 64¹-99² lm/W⁴

Physical

length 1410 mm | width 40 mm | height 100 mm

3.6 kg

¹ Spot ² Linear
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

