

# LINEA opal / 1 spot

wall system

058-6142517BH



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



Light fitting and front cover made of extruded aluminium profile; angular design; linear; for lighting systems; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 97$ ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K left; incl. converter, non dimmable; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



## General

Wall | Surface \_\_\_\_\_

tilt max 89° \_\_\_\_\_

white | RAL 9010 <sup>1</sup> \_\_\_\_\_

IP20 \_\_\_\_\_

172 lm \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI  $\geq 97^{2-90^3}$  \_\_\_\_\_

L95 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup> \_\_\_\_\_

initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

R<sub>g</sub>: 102<sup>2</sup>-99<sup>3</sup> | R<sub>f</sub>: 96<sup>2</sup>-91<sup>3</sup> | R<sub>{f-15}</sub>: 96<sup>2</sup>-89<sup>3</sup> \_\_\_\_\_

MR 0.63<sup>2</sup>-0.61<sup>3</sup> | MDER 0.57<sup>2</sup>-0.55<sup>3</sup> \_\_\_\_\_

## Optical

beam angle 30° \_\_\_\_\_

PstLM  $\leq 1.0^{2-3-4}$  | SVM  $\leq 0.4^{2-3-4}$  \_\_\_\_\_

High Performance Opal | flood<sup>2</sup>-opal (lambertsch)<sup>3</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

PC1 | 220-240 V \_\_\_\_\_

system 2.7<sup>2</sup>-17.6<sup>3</sup> W \_\_\_\_\_


system 64<sup>2</sup>-100<sup>3</sup> lm/W <sup>5</sup> \_\_\_\_\_

## Physical

length 706 mm | width 40 mm | height 100 mm \_\_\_\_\_

left \_\_\_\_\_


## Light distribution

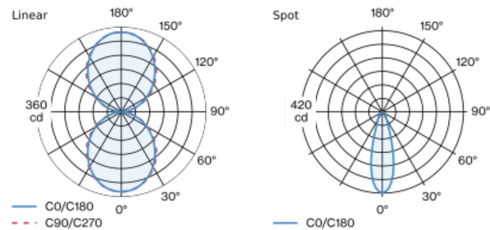

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



# LINEA opal / 1 spot

wall system

058-6142517BH



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	23
B13	30
B16	36
B20	46
C10	35
C13	50
C16	60
C20	76

## Mounting accessories

### END CAPS

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1 pair	pure white	40-100-12	050-2540107
1 pair	jet black	40-100-12	050-2540108



## Mounting accessories

### LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 piece	050-2551100
10 pieces	050-2551100.10



## Electrical accessories

### THROUGH WIRE

TYPE	ARTICLE NUMBER(S)
10 pieces	004-90003
10 pieces	004-90005

