


MINO 100 mid lumen

surface

056-41L5617H



Project / Type _____
Notes _____
Count / Date _____

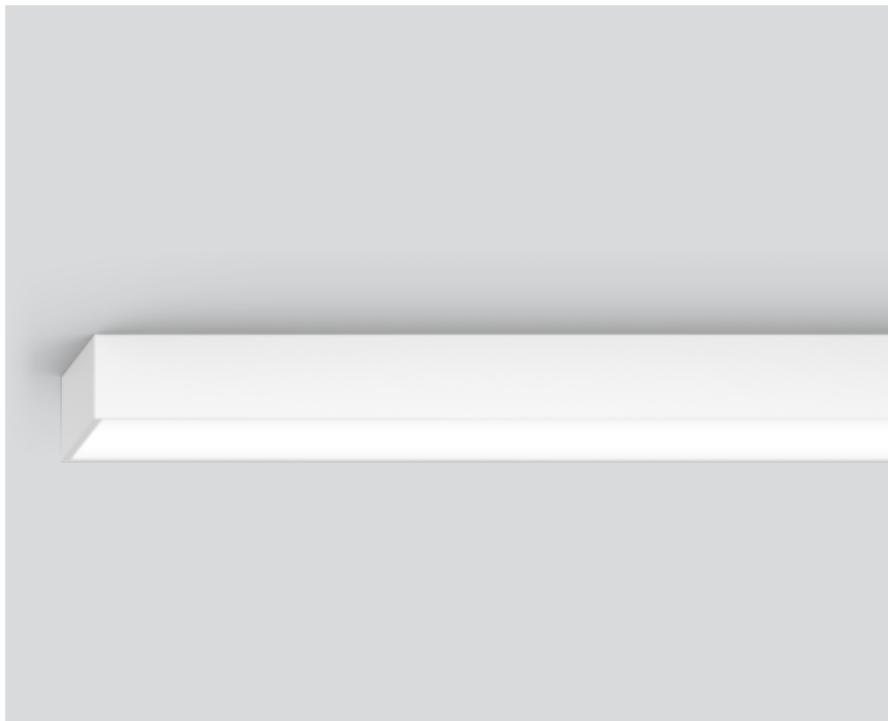

General

Ceiling | Surface
white | RAL 9010 ¹
IP20
2670 lm
1820 lm/m

LED

4000 K
CRI ≥ 80
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
MR 0.72 | MDER 0.66

Optical

High Performance Opal | opal (lambertsch)

Electrical


non DIM
PC1 | 220-240 V
system 19.2 W
system 139 lm/W ²
13 W/m

Physical


length 1488 mm | width 102 mm | height 82 mm
4.9

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface white powder coated; suitable for wall or ceiling mounting; lighting profile (end cover pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

