

# FRAME 100 high lumen

trim


052-43M8517Z



Project / Type

Notes

Count / Date

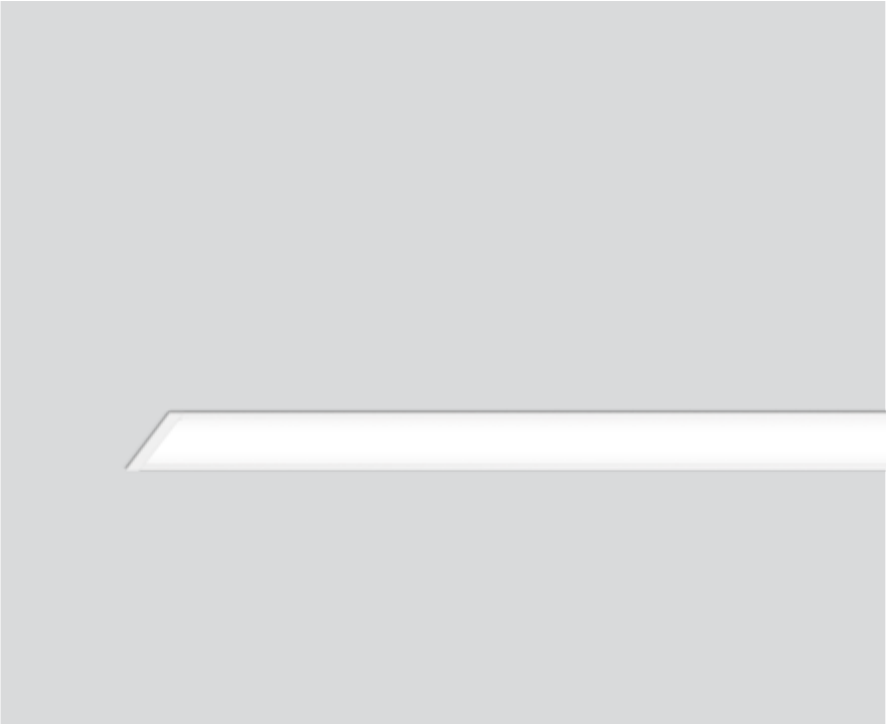

### General

Ceiling | Recessed

white | RAL 9016 <sup>1</sup>

IP20

6160 lm

2630 lm/m

### LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.54 | MDER 0.49

### Optical

Microprismatic | microprismatic

PstLM ≤ 1.0 <sup>2</sup> | SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

PC1 | 220-240 V

system 55 W

system 112 lm/W <sup>3</sup>

24 W/m

### Physical

trim

length 2368 mm | width 120 mm | height 82 mm

8.1 kg

### Cutout


length 2356 mm | width 108 mm

min. ceiling thickness 8 mm | max. ceiling thickness 25 mm


recessed depth 108 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator



# FRAME 100 high lumen

trim

052-43M8517Z



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.98                         | 0.95   | 0.93              | 0.91                            | 0.9    |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Factor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 9                  |
| B13                            | 12                 |
| B16                            | 15                 |
| B20                            | 19                 |
| C10                            | 15                 |
| C13                            | 20                 |
| C16                            | 25                 |
| C20                            | 32                 |

## Mounting accessories

### CONCRETE INSTALLATION HOUSING

|             |                   |
|-------------|-------------------|
| L·W·H (MM)  | ARTICLE NUMBER(S) |
| 2407·116·94 | 036-05236         |

