




## Light distribution

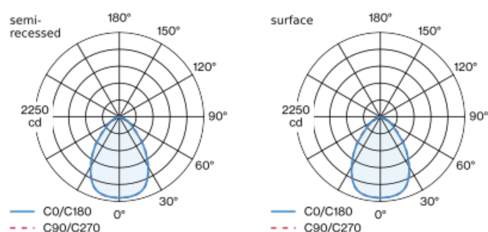

70×L+13

13

28

15

89

L

25

11

85

L

## General

2010 lm/m

**LED**

MR 0.72 | MDER 0.66

## Optical

$$\text{PstLM} \leq 1.0^{1\ 2\ 4} \mid \text{SVM} \leq 0.4^{1\ 2\ 4}$$

## Electrical

16 W/m

## Physical

4.3 kg

## Cutout

recessed depth 13 mm

<sup>1</sup> surface <sup>2</sup> semi-recessed <sup>3</sup> RAL code<sup>4</sup> Value of containing product at full load (undimmed)<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions

