



Project / Type
Notes
Count / Date



General

Ceiling / Wall , Semi-Recessed ¹ -Surface ²
black , RAL 9005 ³
front IP40 ¹ -IP20 ² , back IP20
3520 lm
1930 lm/m
jet black

LED

3000 K
CRI ≥ 80
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49

Optical

Jut-Out
opal (lambertsch)
PstLM ≤ 1.0 ^{1 2 4}
SVM ≤ 0.4 ^{1 2 4}

Electrical

DALI-2
220-240 V
system 28.6 W
system 123 lm/W ⁵
PC1
1 DALI Addr.
16 W/m


Physical

length 1830 mm
width 89 mm
height 38 mm
4.3 kg


Cutout

length 1843 mm
width 70 mm
min. ceiling thickness 12.5 mm
recessed depth 13 mm

Light distribution

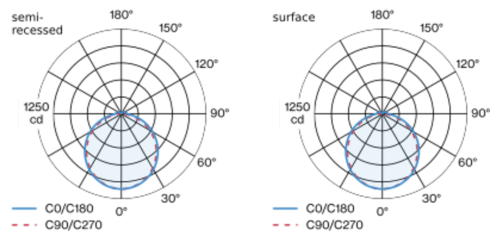

Product drawing



¹ semi-recessed ² surface ³ RAL code
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

