

LENO microprismatic

trim


051-8418637G



Project / Type

Notes

Count / Date

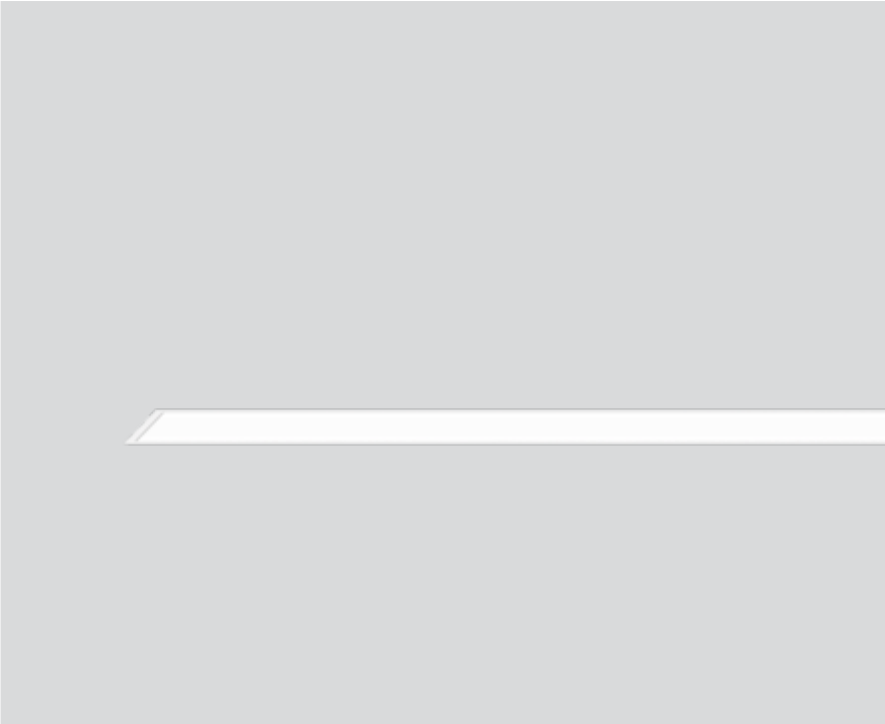

General

Ceiling / Wall , Recessed

white , RAL 9016 ¹

front IP40 , back IP20

4910 lm

2010 lm/m

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

Optical

Microprismatic

microprismatic

UGR ≤ 19

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 38 W

system 129 lm/W³

PC2

1 DALI Addr.

16 W/m

Physical

trim

length 2454 mm

width 102 mm

height 14 mm

5.7 kg

Cutout

length 2444 mm

width 92 mm

min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 58 mm

recessed depth: 12.5 mm (ceiling) + 45 mm (converter)


¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



LENO microprismatic

trim

051-8418637G



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.98 | 0.95 | 0.93 | 0.91 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Factor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 13 |
| B13 | 18 |
| B16 | 22 |
| B20 | 28 |
| C10 | 21 |
| C13 | 30 |
| C16 | 36 |
| C20 | 46 |

Other accessories

DISMOUNTING TOOL

| | |
|------------|-------------------|
| TYPE | ARTICLE NUMBER(S) |
| vacuum cup | 086-30000 |

