

# LENO microprismatic

semi-recessed / surface system

051-8112537G 051-8920068




Project / Type
Notes
Count / Date




Low profile recessed mounted luminaire, 15 mm visible height or low profile surface mounted luminaire, 28 mm total height; converter integrated into luminaire housing; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; for continuous lighting systems; surface black powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light directed downward through LGP (LIGHT GUIDING PRISM) body and high efficiency reflector; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; UGR  $\leq 19$ ; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional;

## Light distribution

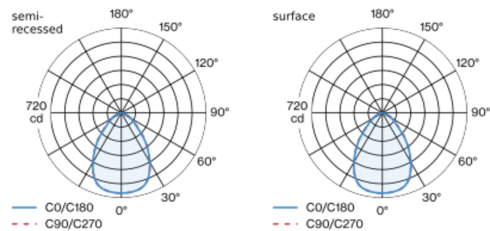

## Product drawing



220-240 V
IP20 IP40
~ X-PERT

## General

Ceiling / Wall   Surface <sup>1</sup> -Semi-Recessed <sup>2</sup>
black   RAL 9005 <sup>3</sup>
jet black
front IP20 <sup>1</sup> -IP40 <sup>2</sup>   back IP20
1160 lm
1890 lm/m

## LED

3000 K
CRI $\geq 80$
L90 / 50000 h
initial MacAdam $\leq 3$ SDCM
MR 0.54   MDER 0.49

## Optical

Microprismatic   microprismatic
UGR $\leq 19$
PstLM $\leq 1.0$ <sup>1 2 4</sup>   SVM $\leq 0.4$ <sup>1 2 4</sup>

## Electrical

DALI-2   1 DALI Addr.
PC1   220-240 V
system 10.8 W
system 107 lm/W <sup>5</sup>
18 W/m

## Physical

length 613 mm   width 89 mm   height 28 mm
1.8 kg

## Cutout

length 626 mm   width 70 mm
min. ceiling thickness 12.5 mm
recessed depth 13 mm

<sup>1</sup> surface <sup>2</sup> semi-recessed <sup>3</sup> RAL code  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses  
and operating device efficiency

## Installation instructions

