

LENO jut-out

semi-recessed / surface system

051-8218537J 051-8920247



Project / Type

Notes

Count / Date



General

Ceiling / Wall | Semi-Recessed¹-Surface²

pure white | RAL 9010

front IP40¹-IP20² | back IP20

4700 lm

1930 lm/m

traffic white

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.54 | MDER 0.49

Optical

Jut-Out | opal (lambertsch)

PstLM ≤ 1.0^{1 2 3} | SVM ≤ 0.4^{1 2 3}

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 38 W

system 124 lm/W⁴

16 W/m

Physical

length 2438 mm | width 89 mm | height 38 mm

5.5 kg

Cutout


length 2451 mm | width 70 mm

min. ceiling thickness 12.5 mm


recessed depth 13 mm

Low profile recessed mounted luminaire, 15 mm visible height or low profile surface mounted luminaire, 28 mm total height; converter integrated into luminaire housing; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; for continuous lighting systems; surface pure white powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light directed downward through LGP (LIGHT GUIDING PRISM) body and high efficiency reflector; HPO (High Performance Opal) cover for uniform illumination; jut-out cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection from below IP40 (from above IP20); PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional;

Light distribution

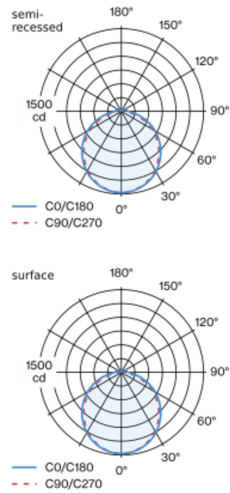

Product drawing



¹ semi-recessed ² surface
³ Value of containing product at full load (undimmed)
⁴ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

