




Project / Type
Notes
Count / Date

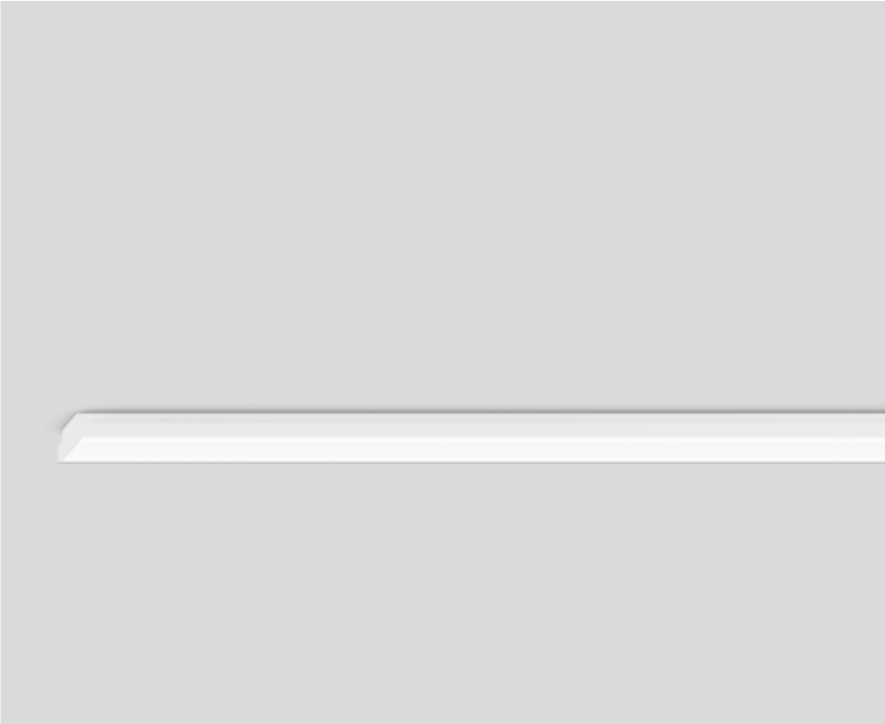

General
Ceiling / Wall , Semi-Recessed ¹ -Surface ²
white , RAL 9010 ³
front IP40 ¹ -IP20 ² , back IP20
4900 lm
2010 lm/m
traffic white

LED
3000 K
CRI ≥ 80
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49

Optical
High Performance Opal
opal (lambertsch)
PstLM ≤ 1.0 ^{1 2 4}
SVM ≤ 0.4 ^{1 2 4}


Electrical
DALI-2
220-240 V
system 38 W
system 129 lm/W ⁵
PC1
1 DALI Addr.
16 W/m

Physical
length 2438 mm
width 89 mm
height 28 mm
5.5 kg


Cutout
length 2451 mm
width 70 mm
min. ceiling thickness 12.5 mm
recessed depth 13 mm

¹ semi-recessed ² surface ³ RAL code
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution

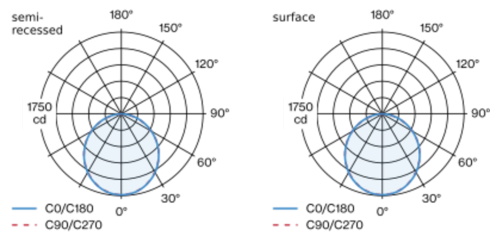

Product drawing



Installation instructions

