

# MOVE IT 45 track indirect


050-743853X



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

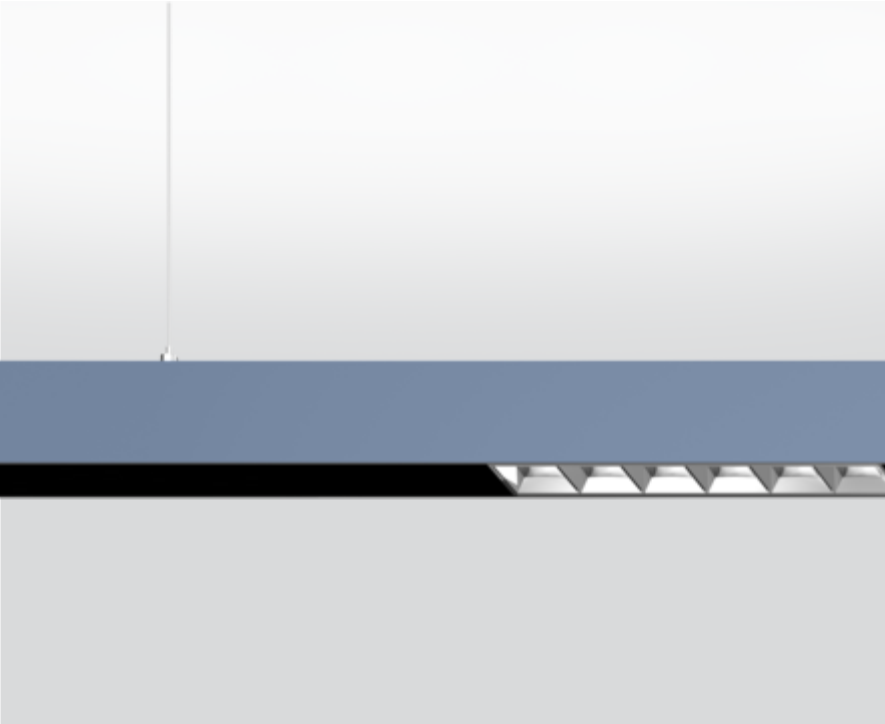

Extruded aluminium profile with 45mm width groove; for suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; indirect light component covered with opal lens cover; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power track profile for take off of supply voltage and DALI signal; surface special colours powder coated; Inner colour anodised black; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3; 48 V; accessories are listed separately; light source not replaceable;

## Light distribution



## Product drawing



### General

Ceiling , Suspended \_\_\_\_\_

special colours , RAL 9005 <sup>1</sup> \_\_\_\_\_

Inner colour black \_\_\_\_\_

IP20 \_\_\_\_\_

3890 lm \_\_\_\_\_

1700 lm/m \_\_\_\_\_

optical inset 139 lm/W<sup>2</sup> \_\_\_\_\_

### LED

3000 K \_\_\_\_\_

CRI  $\geq 90$  \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.61 \_\_\_\_\_

MDER 0.55 \_\_\_\_\_

### Optical

PstLM  $\leq 1.0$  <sup>3</sup> \_\_\_\_\_

SVM  $\leq 0.4$  <sup>3</sup> \_\_\_\_\_

### Electrical

DALI-2 single control \_\_\_\_\_

48 V \_\_\_\_\_

fixture 33 W \_\_\_\_\_

optical inset 27.9 W \_\_\_\_\_

PC3 \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

14 W/m \_\_\_\_\_

### Physical

length 2420 mm \_\_\_\_\_

width 48 mm \_\_\_\_\_

height 60 mm \_\_\_\_\_

3.2 kg \_\_\_\_\_

<sup>1</sup> RAL code <sup>2</sup> incl. consideration of optical losses  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

