

# L24 OFFICE

MOVE IT 45


050-3213D38R



Project / Type


Notes

Count / Date

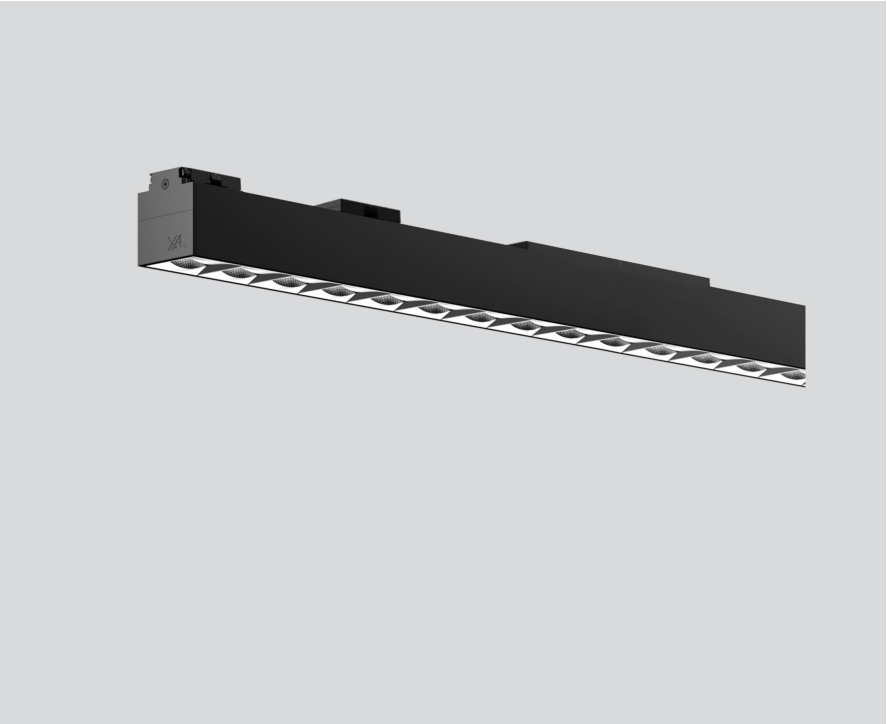

Linear light inset made of aluminium; surface anodised jet black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; equipped with 24 specially computed OFFICE light elements; high gloss reflector with faceted design; Reflector chrome; precise radiation characteristic with symmetrical light distribution;  $UGR \leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500 \text{ cd/m}^2$ ; passive cooling of the LEDs through improved heat sink geometry; light colour: tunable white diodes (2700-6500 K); binning initial MacAdam  $\leq 3 \text{ SDCM}$ ; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

## Light distribution



## Product drawing



## General

Ceiling | Track

jet black | RAL 9005

Reflector chrome

IP20

2800 lm

optical inset 163 lm/W <sup>1</sup>

## LED

tunable white | 2700 K - 6500 K

CRI  $\geq 80$

L90 / 50000 h

initial MacAdam  $\leq 3 \text{ SDCM}$

MR 0.48 | MDER 0.44

## Optical

symmetric | beam angle  $69^\circ$

$UGR \leq 19$  |  $\geq 65^\circ < 1500 \text{ cd/m}^2$

$P_{stLM} \leq 1.0$  <sup>2</sup> |  $SVM \leq 0.4$  <sup>2</sup>

## Electrical

DALI-2 | 1 DALI Addr.

DT8

PC3 | 48 V

fixture 20.2 W

optical inset 17.2 W

## Physical

length 906 mm | width 43 mm | height 48 mm

0.98 kg

<sup>1</sup> incl. consideration of optical losses  
<sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator



# L24 OFFICE

MOVE IT 45

050-3213D38R



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

