

TULA nano suspended


MOVE IT 25 / 25 S / 45
050-1711438F



Project / Type

Notes

Count / Date

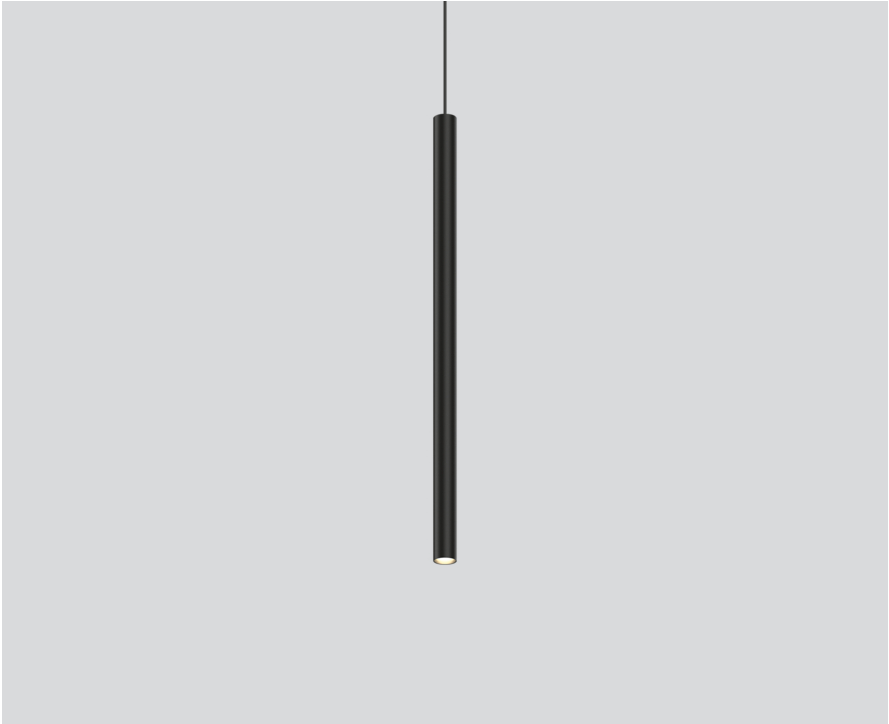

Decorative pendant light inset made of aluminium; surface black powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 30° beam; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



General
Ceiling | Track Suspended
black | RAL 9005 ¹
IP20
667 lm
optical inset 73 lm/W ²

LED
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 | R_f: 91 | R_{h-15}: 89
MR 0.53 | MDER 0.48


Optical
flood | beam angle 30°
PstLM ≤ 1.0 ³ | SVM ≤ 0.4 ³

Electrical
DALI-2 | 1 DALI Addr.
PC3 | 48 V
fixture 12.1 W
optical inset 9.1 W

Physical
diameter 26 mm | height 500 mm
0.35 kg
1500 mm

¹ RAL code ² incl. consideration of optical losses
³ Value of containing product at full load (undimmed)

Light distribution



| flood 30° | | |
|-----------|----------|-------|
| h (m) | EO° (lx) | ø (m) |
| 1 | 1960 | 0.53 |
| 2 | 490 | 1.07 |
| 3 | 220 | 1.60 |
| 4 | 120 | 2.13 |
| 5 | 80 | 2.66 |

Product drawing



Installation instructions



Lighting calculator

