

# TULA nano suspended

MOVE IT 25 / 25 S / 45  
050-1711537F



Project / Type


Notes

Count / Date



Decorative pendant light inset made of aluminium; surface white powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (white), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 30° beam; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

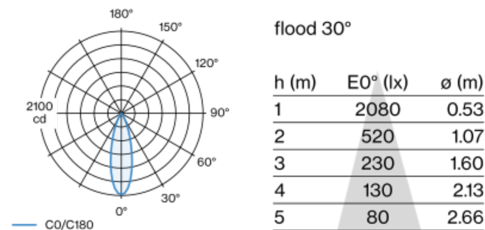

## Product drawing



### General

Ceiling | Track Suspended  
white | RAL 9016 <sup>1</sup>  
IP20  
707 lm  
optical inset 78 lm/W <sup>2</sup>

### LED

3000 K  
CRI  $\geq 90$   
initial MacAdam  $\leq 3$  SDCM  
R<sub>g</sub>: 100 | R<sub>f</sub>: 91 | R<sub>f(1-15)</sub>: 89  
MR 0.59 | MDER 0.53

### Optical

flood | beam angle 30°  
PstLM  $\leq 1.0$  <sup>3</sup> | SVM  $\leq 0.4$  <sup>3</sup>

### Electrical

DALI-2 | 1 DALI Addr.  
PC3 | 48 V  
fixture 12.1 W  
optical inset 9.1 W

### Physical

diameter 26 mm | height 500 mm  
0.35 kg  
1500 mm

<sup>1</sup> RAL code <sup>2</sup> incl. consideration of optical losses  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

