

TULA micro suspended

MOVE IT 25 / 25 S / 45
050-0715417F



Project / Type


Notes

Count / Date




Decorative pendant light inset made of aluminium; surface white powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (white), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 44° beam; degree of protection IP20; PC3; 48 V; non-dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

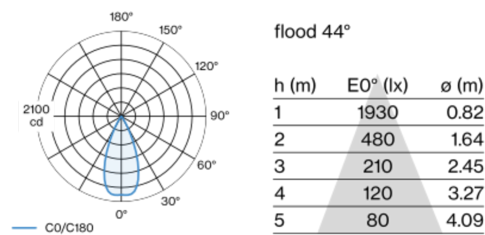

Product drawing



General

Ceiling | Suspended
white | RAL 9016 ¹
IP20
1040 lm

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 96 | R_f: 90 | R_[-15]: 88
MR 0.55 | MDER 0.5

Optical

flood | beam angle 44°
PstLM $\leq 1.0^2$ ³ ⁴ ⁵ | SVM $\leq 0.4^2$ ³ ⁴ ⁵

Electrical

non DIM
PC3 | 48 V
fixture 14.1 W
fixture 74 lm/W ⁶

Physical

diameter 47 mm | height 300 mm
0.45 kg
1500 mm

¹ RAL code ² wallwasher lens BO 45 007-1965780
³ soft lens BO 45 007-1965980 ⁴ oval lens BO 45 007-1965880
⁵ Value of containing product at full load (undimmed)
⁶ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

