

# TULA nano suspended


MOVE IT 25 / 25 S / 45  
050-071151XF



Project / Type


Notes

Count / Date

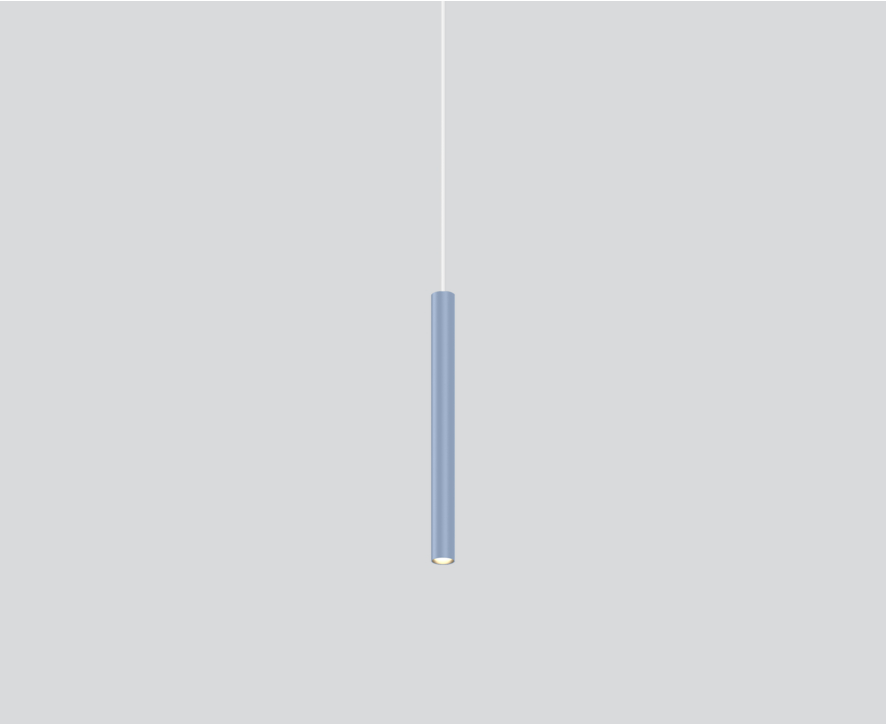


Decorative pendant light inset made of aluminium; surface special colours powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 30° beam; degree of protection IP20; PC3; 48 V; non-dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



| flood 30° |          |       |
|-----------|----------|-------|
| h (m)     | E0° (lx) | ø (m) |
| 1         | 2080     | 0.53  |
| 2         | 520      | 1.07  |
| 3         | 230      | 1.60  |
| 4         | 130      | 2.13  |
| 5         | 80       | 2.66  |

## Product drawing



### General

Ceiling | Suspended

special colours

IP20

707 lm

optical inset 78 lm/W <sup>1</sup>

### LED

3000 K

CRI  $\geq 90$

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 100 | R<sub>f</sub>: 91 | R<sub>{1-15}</sub>: 89

MR 0.59 | MDER 0.53

### Optical

flood | beam angle 30°

PstLM  $\leq 1.0$  <sup>2</sup> | SVM  $\leq 0.4$  <sup>2</sup>

### Electrical

non DIM

PC3 | 48 V

fixture 12.1 W

optical inset 9.1 W

### Physical

diameter 26 mm | height 300 mm

0.25 kg

1500 mm

<sup>1</sup> incl. consideration of optical losses  
<sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator



# TULA nano suspended

MOVE IT 25 / 25 S / 45  
050-071151XF



Project / Type

Notes

Count / Date

## Mounting accessories

### RING TRACK MOUNTED

| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50     | 050-0510117       |
| jet black     | 50     | 050-0510118       |



### RING CEILING MOUNTED

| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50     | 050-0510217       |
| jet black     | 50     | 050-0510218       |



## Optical accessories

### OVAL LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 42     | 007-1965880       |



### SOFT LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 42     | 007-1965980       |



### WALLWASHER LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 42     | 007-1965780       |

