

TULA nano suspended

MOVE IT 25 / 25 S / 45


050-0811417M



Project / Type

Notes

Count / Date

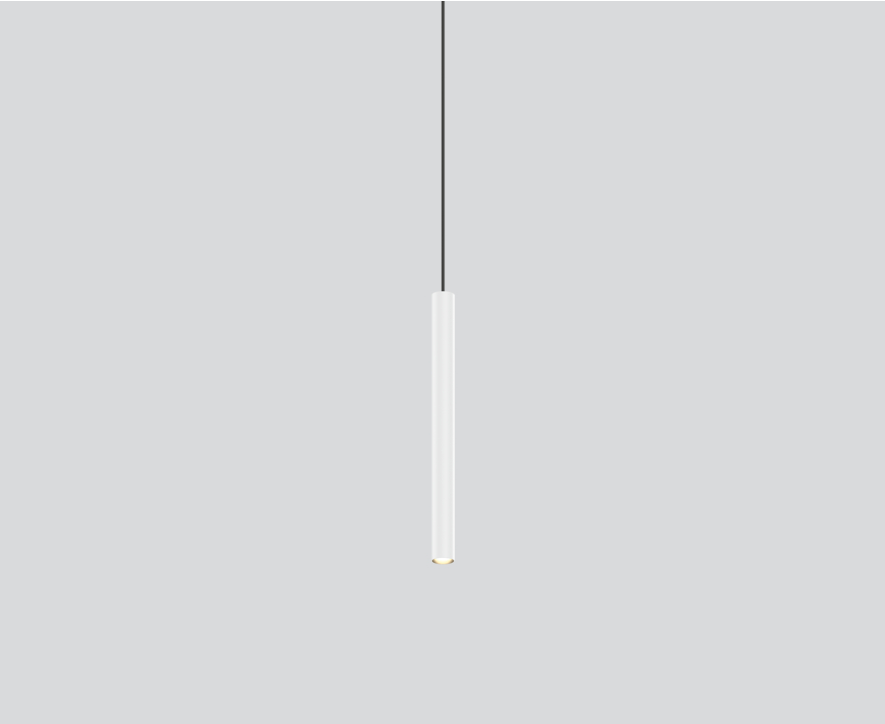

General

Ceiling , Suspended
white , RAL 9016 ¹
IP20
691 lm
optical inset 76 lm/W²

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_r: 91 , R_{t(1-15)}: 89
MR 0.53
MDER 0.48

Optical

medium
beam angle 24°
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³


Electrical

non DIM
48 V
fixture 12.1 W
optical inset 9.1 W
PC3

Physical

diameter 26 mm
height 300 mm
2000 mm with hook

Light distribution



medium 24°

h (m)	EO° (lx)	ø (m)
1	2820	0.43
2	700	0.85
3	310	1.28
4	180	1.71
5	110	2.13

Product drawing



¹ RAL code ² incl. consideration of optical losses

³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

