BO 45 base surface 1 lamp

049-633043XV

Project / Type

Notes

Count / Date

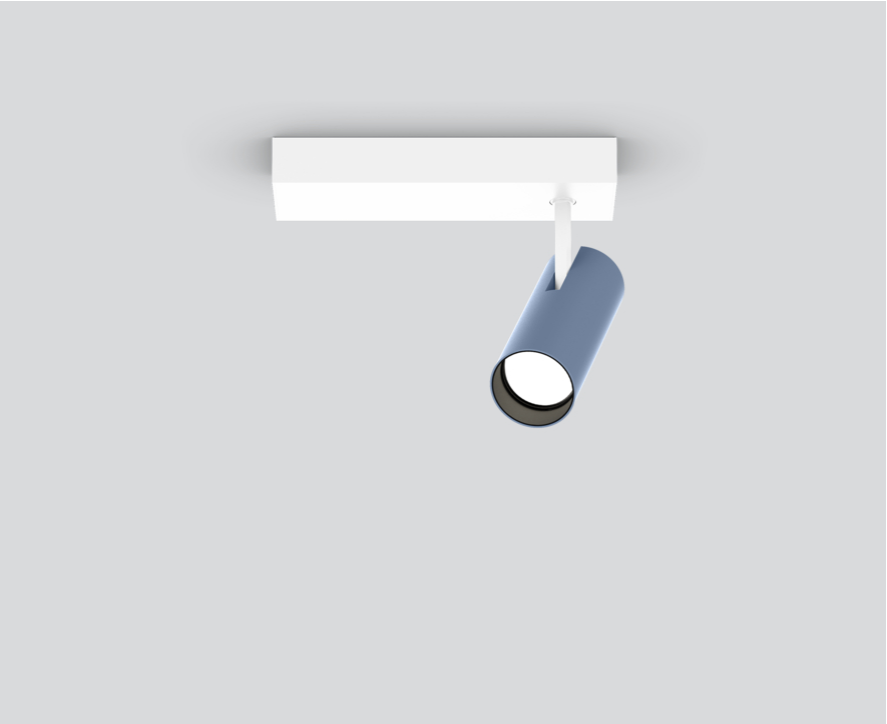

Surface mounted spotlight made of aluminium; 1 lamp; cylindrical spotlight head; surface special colours powder coated; 350° rotatable and 90° tiltable; surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with high power LED for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 8° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); luminaire for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



super spot 8°

h (m)	E0° (lx)	ø (m)
1	14200	0.14
2	3500	0.28
3	1600	0.41
4	900	0.55
5	600	0.69

Product drawing



General

Ceiling , Track
tilt max 90°
rotation 350°
special colours
IP20
406 lm

LED

2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_f: 91 , $R_{f\{1\text{-}15\}}$: 89
MR 0.54
MDER 0.49

Optical

super spot
beam angle 8°
PstLM ≤ 1.0 [1]
SVM ≤ 0.4 [1]

Electrical

DALI-2
220-240 V
system 9.2 W
system 44 lm/W[2]
PC1
1 DALI Addr.

Physical

length 180 mm
width 55 mm
height 163 mm
0.5 kg

[1] Value of containing product at full load (undimmed)
[2] incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

Lighting calculator

['049-633043XV'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com