

TULA nano suspended

canopy surface


049-5710417M 005-2602117



Project / Type

Notes

Count / Date

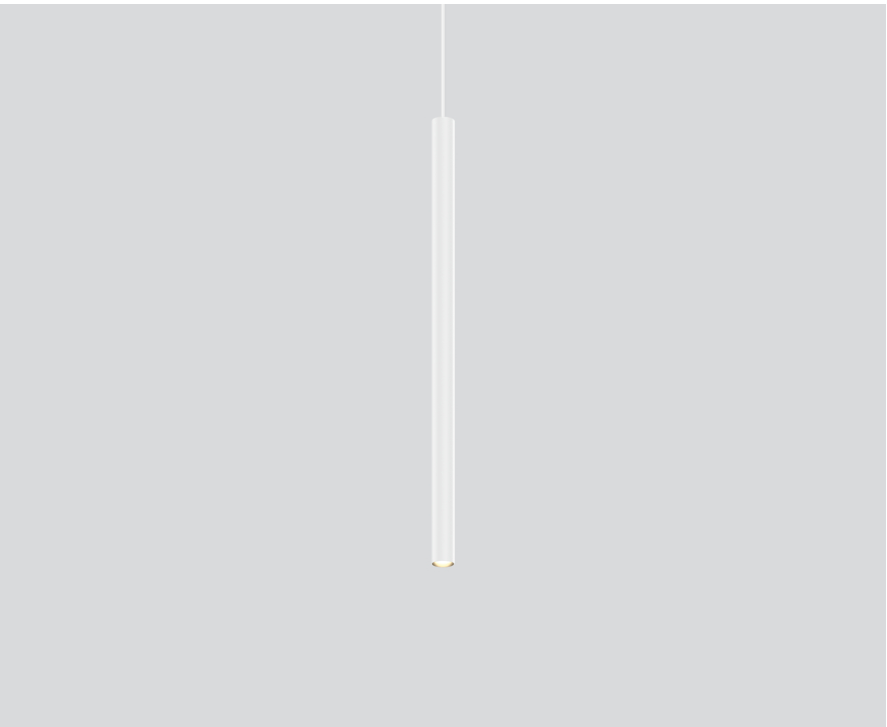

Decorative suspended luminaire in aluminium; surface white powder coated; pendant fitting with 1500mm suspension; incl. feed (white), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 25° beam; degree of protection IP20; PC2; 220-240 V; light source not replaceable; control gear replaceable by an authorized professional;

Light distribution



medium 25°

| h (m) | EO° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 2620 | 0.44 |
| 2 | 660 | 0.89 |
| 3 | 290 | 1.33 |
| 4 | 160 | 1.77 |
| 5 | 100 | 2.22 |

Product drawing



General

Ceiling | Suspended

white | RAL 9016 ¹

Canopy traffic white

IP20

699 lm

fixture 78 lm/W ²

LED

2700 K

CRI ≥ 90

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_f: 91 | R_{f(-15)}: 89

MR 0.53 | MDER 0.48

Optical

medium | beam angle 25°

Electrical

non DIM

PC2 | 220-240 V

system 12.0 W | fixture 9.0 W

18 Vf | 500 mA

Physical

diameter 26 mm | height 500 mm

0.42 kg

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator



TULA nano suspended

canopy surface

049-5710417M 005-2602117



Project / Type

Notes

Count / Date

Components

CANOPY

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 115 | 005-2602117 |



Mounting accessories

SPECIAL MOUNTING TOOL

| TYPE | Ø (MM) | ARTICLE NUMBER(S) |
|--|--------|-------------------|
| necessary to install mounting housing trimless | 100 | 063-8912110 |



RING CEILING MOUNTED

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50 | 050-0510217 |
| jet black | 50 | 050-0510218 |



HOOK

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 18 | 050-0510317 |
| jet black | 18 | 050-0510318 |



Optional electrical accessories

DIN RAIL POWER SUPPLY

| L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|-------------------|
| 72-90-63 | 005-6520210 |



DIN RAIL LED DRIVER

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------------------|------------|-------------------|
| 200 - 1050 mA 2 x 42W | 36-88-59 | 005-6121030 |





Project / Type

Notes

Count / Date

Optical accessories

OVAL LENS

| | |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42 | 007-1965880 |



SOFT LENS

| | |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42 | 007-1965980 |



WALLWASHER LENS

| | |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42 | 007-1965780 |

