

TULA nano suspended

canopy trim

049-551041XF 005-3521017 002-90732



Project / Type _____


Notes _____

Count / Date _____



Decorative suspended luminaire in aluminium; surface special colours powder coated; pendant fitting with 1500mm suspension; incl. feed (white), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 30° beam; degree of protection IP20; PC2; 220-240 V; ceiling recessed canopy with trim traffic white; suitable for ceiling thickness of 2-25 mm; incl. converter, non dimmable; external converter for ceiling insertion; light source not replaceable; control gear replaceable by an authorized professional;


Light distribution



flood 30°

h (m)	E0° (lx)	ø (m)
1	2240	0.53
2	560	1.07
3	250	1.60
4	140	2.13
5	90	2.66

Product drawing

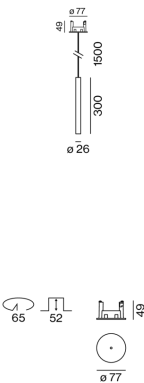

General

Ceiling | Suspended _____

special colours _____

Canopy traffic white _____

IP20 _____

762 lm _____

fixture 86 lm/W ¹ _____

LED

2700 K _____

CRI ≥ 90 _____

initial MacAdam ≤ 2 SDCM _____

R_g: 97 | R_f: 91 | R_{f(1-15)}: 87 _____

MR 0.52 | MDER 0.47 _____

Optical

flood | beam angle 30° _____

PstLM ≤ 1.0 ² | SVM ≤ 0.4 ² _____

Electrical

non DIM _____

PC2 | 220-240 V _____

system 11.8 W | fixture 8.9 W _____

18 Vf | 500 mA _____

Physical

diameter 26 mm | height 300 mm _____

0.33 kg _____

Cutout

diameter 65 mm _____

min. ceiling thickness 2 mm | max. ceiling thickness 25 mm _____

recessed depth 70 mm _____

¹ incl. consideration of optical losses & internal control unit losses

² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

