


TULA nano suspended

canopy trim

049-571051XF 005-3521017 002-90733



Project / Type	
Notes	
Count / Date	

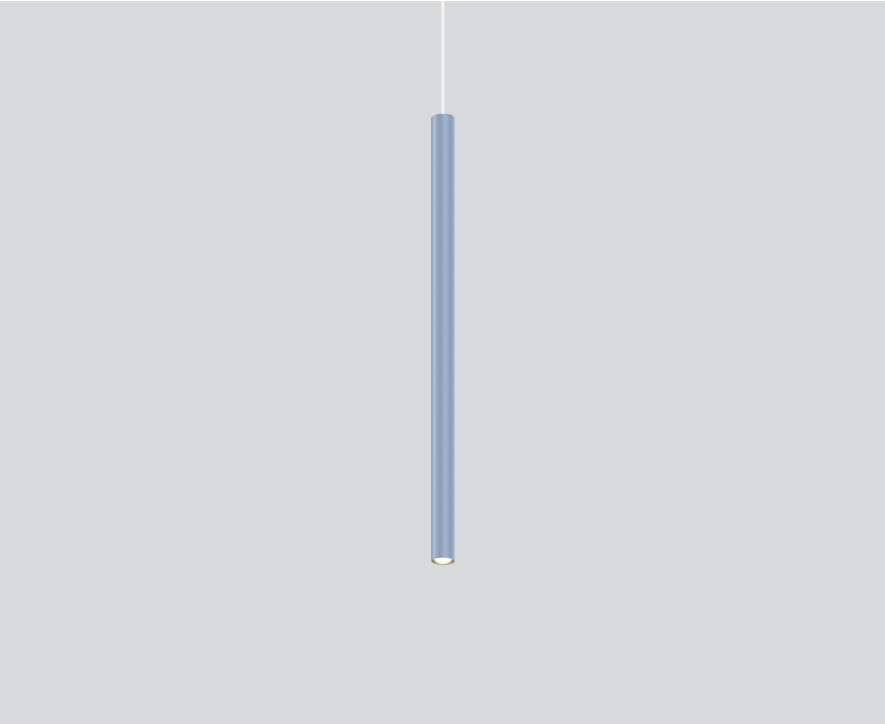

General

Ceiling , Suspended	
special colours	
Canopy traffic white	
IP20	
717 lm	
fixture 79 lm/W ¹	

LED

3000 K	
CRI ≥ 90	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 91 , R ₍₁₋₁₅₎ : 88	
MR 0.59	
MDER 0.53	

Optical

flood	
beam angle 30°	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 12.1 W	
fixture 9.1 W	
18 Vf	
500 mA	
PC2	


Physical

diameter 26 mm	
height 500 mm	
0.45 kg	

Cutout

diameter 65 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 130 mm	


Light distribution



flood 30°

h (m)	E0° (lx)	ø (m)
1	2110	0.53
2	530	1.07
3	230	1.60
4	130	2.13
5	80	2.66

Product drawing

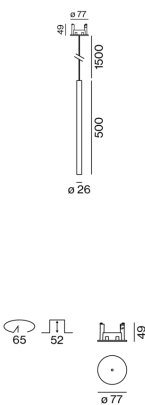

¹ incl. consideration of optical losses & internal control unit losses
² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

