

# TULA nano suspended

canopy trim


049-5510414F 005-3521018 002-90732



Project / Type

Notes

Count / Date

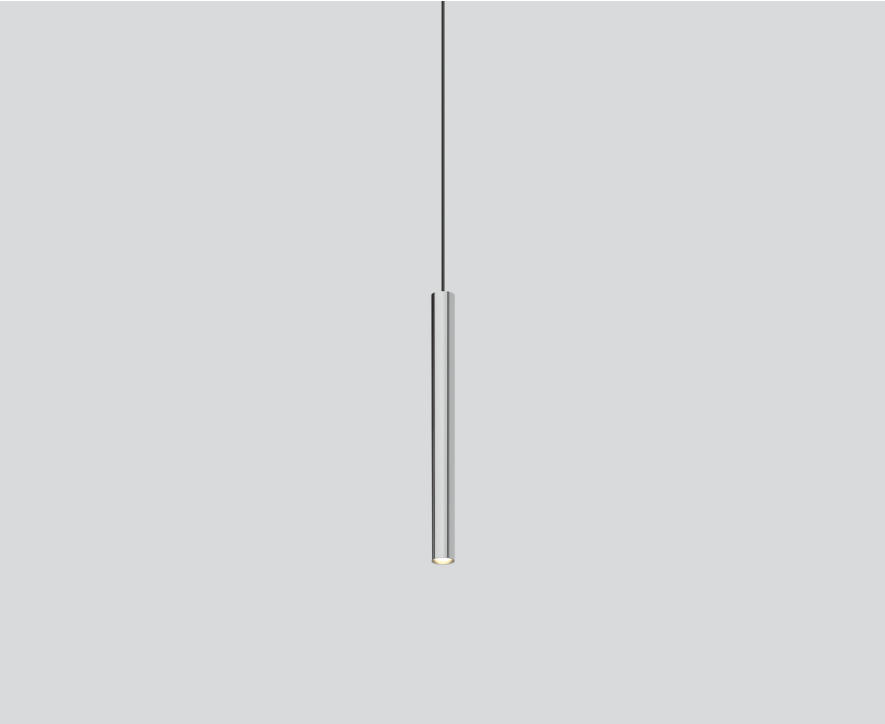

General

Ceiling | Suspended

chrome

Canopy jet black

IP20

762 lm

fixture 86 lm/W <sup>1</sup>

LED

2700 K

CRI ≥ 90

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 | R<sub>f</sub>: 91 | R<sub>f(1-15)</sub>: 87

MR 0.52 | MDER 0.47

Optical

flood | beam angle 30°

PstLM ≤ 1.0 <sup>2</sup> | SVM ≤ 0.4 <sup>2</sup>

Electrical

non DIM

PC2 | 220-240 V

system 11.8 W | fixture 8.9 W

18 Vf | 500 mA

Physical

diameter 26 mm | height 300 mm

0.32 kg

Cutout

diameter 65 mm


min. ceiling thickness 2 mm | max. ceiling thickness 25 mm

recessed depth 70 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

<sup>2</sup> Value of containing product at full load (undimmed)


Light distribution



flood 30°

h (m)	E0° (lx)	ø (m)
1	2240	0.53
2	560	1.07
3	250	1.60
4	140	2.13
5	90	2.66

Product drawing



Installation instructions



Lighting calculator

