

TULA nano suspended

canopy trim


049-5710517F 005-3521017 002-90733



Project / Type

Notes

Count / Date

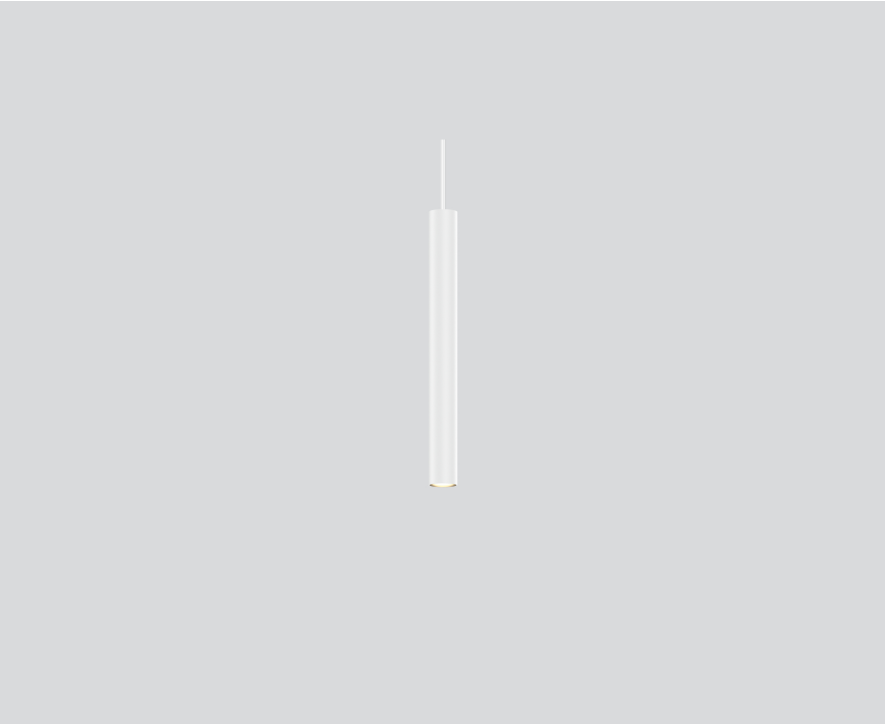

Decorative suspended luminaire in aluminium; surface traffic white powder coated; pendant fitting with 1500mm suspension; incl. feed (white), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 30° beam; degree of protection IP20; PC2; 220-240 V; ceiling recessed canopy with trim traffic white; suitable for ceiling thickness of 2-25 mm; incl. DALI-2 converter; external converter for ceiling insertion; light source not replaceable; control gear replaceable by an authorized professional;


Light distribution



flood 30°

h (m)	E0° (lx)	ø (m)
1	2110	0.53
2	530	1.07
3	230	1.60
4	130	2.13
5	80	2.66

Product drawing

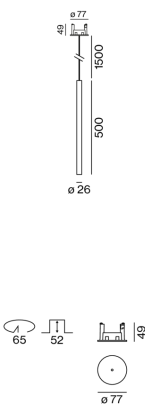

Project / Type

Notes

Count / Date



General

Ceiling | Suspended
traffic white | RAL 9016 ¹
Canopy traffic white
IP20
717 lm
fixture 79 lm/W ²

LED

3000 K
CRI ≥ 90
initial MacAdam ≤ 3 SDCM
R_g: 100 | R_f: 91 | R_{f(1-15)}: 89
MR 0.59 | MDER 0.53

Optical

flood | beam angle 30°
PstLM ≤ 1.0 ³ | SVM ≤ 0.4 ³

Electrical

DALI-2
PC2 | 220-240 V
system 12.1 W | fixture 9.1 W
18 Vf | 500 mA

Physical

diameter 26 mm | height 500 mm
0.45 kg

Cutout

diameter 65 mm
min. ceiling thickness 2 mm | max. ceiling thickness 25 mm
recessed depth 130 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

