

# TULA nano suspended

canopy trim

049-5710514F 005-3521018 002-90733



Project / Type


Notes

Count / Date



Decorative suspended luminaire in aluminium; surface polished chrome; pendant fitting with 1500mm suspension; incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 30° beam; degree of protection IP20; PC2; 220-240 V; ceiling recessed canopy with trim jet black; suitable for ceiling thickness of 2-25 mm; incl. DALI-2 converter; external converter for ceiling insertion; light source not replaceable; control gear replaceable by an authorized professional;


## Light distribution



flood 30°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 2110     | 0.53  |
| 2     | 530      | 1.07  |
| 3     | 230      | 1.60  |
| 4     | 130      | 2.13  |
| 5     | 80       | 2.66  |

## Product drawing

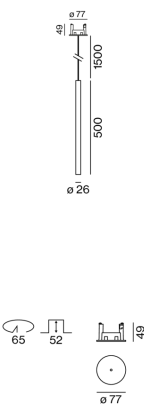

## General

Ceiling | Suspended

chrome

Canopy jet black

IP20

717 lm

fixture 79 lm/W <sup>1</sup>

## LED

3000 K

CRI  $\geq 90$

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 100 | R<sub>f</sub>: 91 | R<sub>t(1-15)</sub>: 89

MR 0.59 | MDER 0.53

## Optical

flood | beam angle 30°

PstLM  $\leq 1.0$  <sup>2</sup> | SVM  $\leq 0.4$  <sup>2</sup>

## Electrical

DALI-2

PC2 | 220-240 V

system 12.1 W | fixture 9.1 W

18 Vf | 500 mA

## Physical

diameter 26 mm | height 500 mm

0.45 kg

## Cutout

diameter 65 mm

min. ceiling thickness 2 mm | max. ceiling thickness 25 mm

recessed depth 130 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses  
<sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator



# TULA nano suspended

canopy trim

049-5710514F 005-3521018 002-90733



Project / Type

Notes

Count / Date

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 80                 |
| B13                            | 104                |
| B16                            | 130                |
| B20                            | 162                |
| C10                            | 135                |
| C13                            | 175                |
| C16                            | 220                |
| C20                            | 270                |

## Components

### MOUNTING SET with trim

|           |        |                   |
|-----------|--------|-------------------|
| COLOUR    | Ø (MM) | ARTICLE NUMBER(S) |
| jet black | 77     | 005-3521018       |

### POWER SUPPLY

|            |                   |
|------------|-------------------|
| L-W-H (MM) | ARTICLE NUMBER(S) |
| 147-33-23  | 002-90733         |

## Mounting accessories

### SPECIAL MOUNTING TOOL

|  |        |                   |
|--|--------|-------------------|
| TYPE   | Ø (MM) | ARTICLE NUMBER(S) |
| necessary to install mounting housing trimless | 100    | 063-8912110       |

### RING CEILING MOUNTED

|               |        |                   |
|---------------|--------|-------------------|
| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
| traffic white | 50     | 050-0510217       |
| jet black     | 50     | 050-0510218       |

### HOOK

|               |        |                   |
|---------------|--------|-------------------|
| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
| traffic white | 18     | 050-0510317       |
| jet black     | 18     | 050-0510318       |

## Optional electrical accessories

### DIN RAIL POWER SUPPLY

|            |                   |
|------------|-------------------|
| L-W-H (MM) | ARTICLE NUMBER(S) |
| 72-90-63   | 005-6520210       |

### DIN RAIL LED DRIVER

|                         |            |                   |
|-------------------------|------------|-------------------|
| TYPE                    | L-W-H (MM) | ARTICLE NUMBER(S) |
| 200 - 1050 mA   2 x 42W | 36-88-59   | 005-6121030       |



[‘049-5710514F 005-3521018 002-90733’] The technical data represent rated values for an ambient temperature of 25 °C. The luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)

18.06.2025

# TULA nano suspended

canopy trim

049-5710514F 005-3521018 002-90733



Project / Type

Notes

Count / Date

## Optical accessories

### OVAL LENS

|        |                   |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42     | 007-1965880       |



### SOFT LENS

|        |                   |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42     | 007-1965980       |



### WALLWASHER LENS

|        |                   |
|--------|-------------------|
| Ø (MM) | ARTICLE NUMBER(S) |
| 42     | 007-1965780       |

