

ARY adjustable rod suspended

canopy trimless


049-5231618M 005-3511017 002-90733



Project / Type

Notes

Count / Date

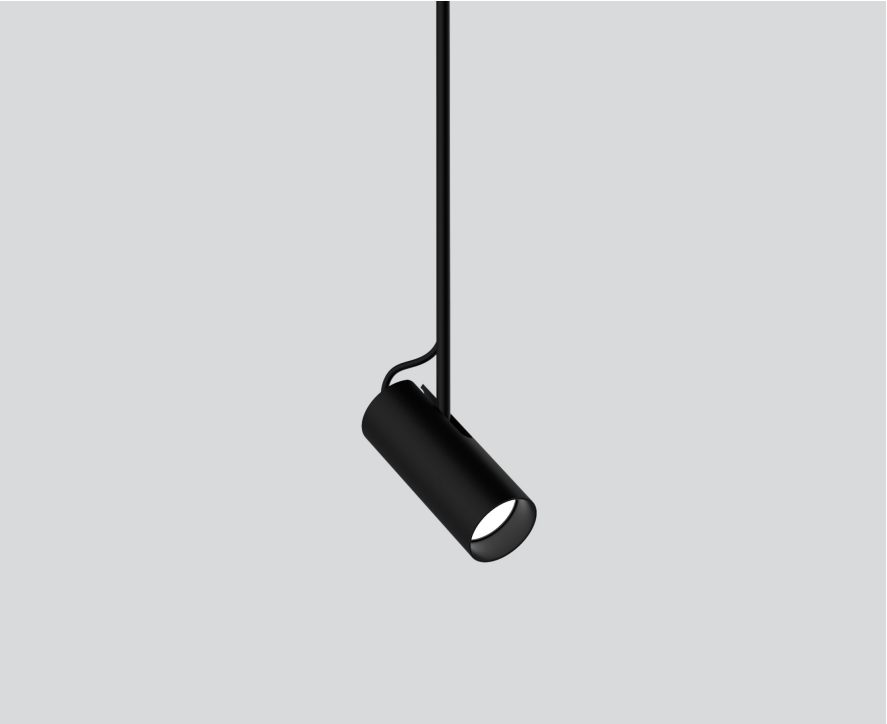

General

Ceiling | Suspended

tilt max 90°

rotation 265°

jet black | RAL 9005 ¹

Canopy traffic white

IP20

739 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 | R_r: 89 | R_{t(1-15)}: 87

MR 0.81 | MDER 0.73

Optical

medium | beam angle 25°

PstLM ≤ 1.0² 3 4 5 | SVM ≤ 0.4² 3 4 5

Electrical

DALI-2 | 1 DALI Addr.

PC2 | 220-240 V

system 11.2 W | fixture 8.4 W

fixture 88 lm/W ⁶

18 Vf | 500 mA


Physical

rod 1500 mm with hook

diameter 47 mm | height 110 mm

0.98 kg



Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	3200	0.44
2	800	0.89
3	360	1.33
4	200	1.78
5	130	2.22

Product drawing



Cutout

diameter 65 mm

min. ceiling thickness 9 mm | max. ceiling thickness 25 mm

recessed depth 130 mm

¹ RAL code ² soft lens BO 45 007-1965980
³ oval lens BO 45 007-1965880
⁴ wallwasher lens BO 45 007-1965780
⁵ Value of containing product at full load (undimmed)
⁶ incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

