

# TULA nano suspended

canopy trim

049-571041XM 005-3521017 002-90732



Project / Type

Notes

Count / Date



### General

Ceiling , Suspended

special colours

Canopy traffic white

IP20

699 lm

fixture 78 lm/W<sup>1</sup>

### LED

2700 K

CRI ≥ 90

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89

MR 0.53

MDER 0.48

### Optical

medium

beam angle 25°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

220-240 V

system 12.0 W

fixture 9.0 W

18 Vf

500 mA

PC2

### Physical

diameter 26 mm

height 500 mm

0.43 kg

### Cutout

diameter 65 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 70 mm


### Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	2620	0.44
2	660	0.89
3	290	1.33
4	160	1.77
5	100	2.22

### Product drawing

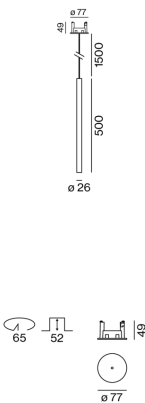

<sup>1</sup> incl. consideration of optical losses & internal control unit losses  
<sup>2</sup> Value of containing product at full load (undimmed)

### Installation instructions



### Lighting calculator

