

SASSO 60 round adjustable

trim

048-2622E11F 048-269631G 002-90762




Project / Type
Notes
Count / Date




Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 36° beam; UGR ≤ 19 ; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

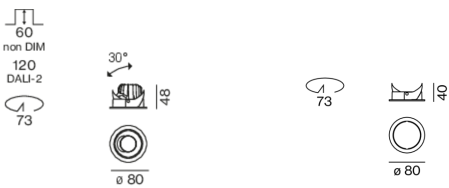

General

Ceiling , Recessed
tilt max 30°
rotation 360°
black , RAL 9005 ¹
Mounting set white aluminium
front IP40 , back IP20
672 lm
fixture 66 lm/W ²

LED

colour warm dimming
1800 K - 3000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _f : 94 , R _{f(1-15)} : 96
MR 0.64
MDER 0.58

Optical

flood
beam angle 36°
UGR ≤ 19
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 12.0 W
fixture 10.2 W
300 mA
PC2
1 DALI Addr.

Physical

trim
diameter 80 mm
height 48 mm
0.31 kg

Cutout

diameter 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)



SASSO 60 round adjustable

trim

048-2622E11F 048-269631G 002-90762



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

